
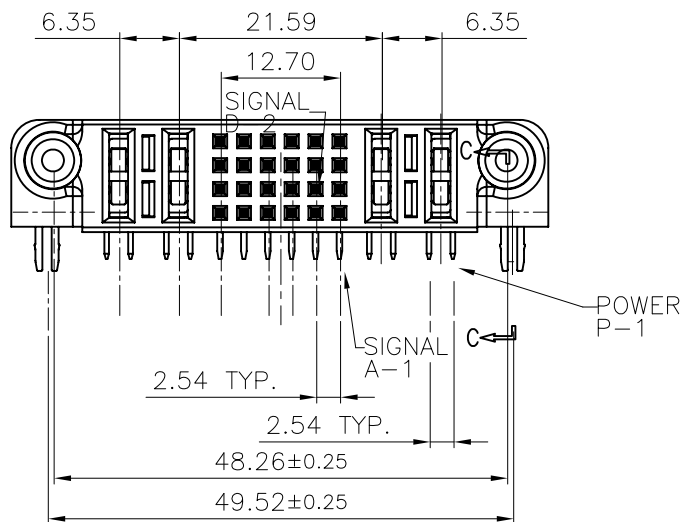


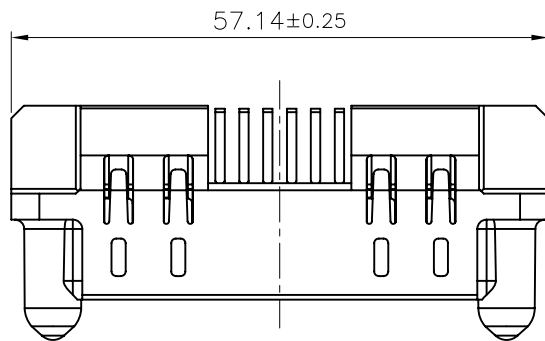

NOTES:

1. MATERIAL:

1-1 HOUSING:HIGH TEMP THERMOPLASTIC,UL94V-0.

1-2 POWER CONTACT:HIGH PERFORMANCE COPPER ALLOY


1-3 SIGNAL CONTACT:COPPER ALLOY

PLATING : 50u" MIN NICKEL UNDERPLATING OVER ALL

2. REFLOW SOLDER CAPABLE TO 260°C

3. POWER CONTACT ASSIGNMENT

D C B A			PA	PA	<table border="1"><tr><td>R</td><td>R</td><td>R</td><td>R</td><td>R</td><td>R</td><td>R</td><td>R</td></tr><tr><td>R</td><td>R</td><td>R</td><td>R</td><td>R</td><td>R</td><td>R</td><td>R</td></tr><tr><td>R</td><td>R</td><td>R</td><td>R</td><td>R</td><td>R</td><td>R</td><td>R</td></tr><tr><td>R</td><td>R</td><td>R</td><td>R</td><td>R</td><td>R</td><td>R</td><td>R</td></tr></table>				R	R	R	R	R	R	R	R	R	R	R	R	R	R	R	R	R	R	R	R	R	R	R	R	R	R	R	R	R	R	R	R	PA	PA	
R	R	R	R	R	R	R	R																																				
R	R	R	R	R	R	R	R																																				
R	R	R	R	R	R	R	R																																				
R	R	R	R	R	R	R	R																																				
			<table border="1"><tr><td>V</td><td>V</td><td>V</td><td>V</td><td>V</td><td>V</td><td>V</td><td>V</td><td>V</td><td>V</td><td>V</td><td>V</td></tr></table>								V	V	V	V	V	V	V	V	V	V	V	V																					
V	V	V	V	V	V	V	V	V	V	V	V																																
SIGNAL ROWS		E2	P8	P7	6	5	4	3	2	1	P2	P1	E1																														
			POWER		SIGNAL				POWER																																		
PA	STANDARD																																										
PC	SHORT																																										

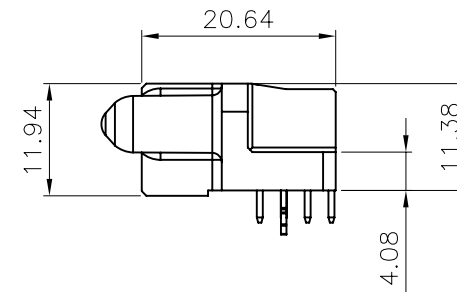

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ± 0.50
.X ± 0.25
.XX ± 0.15
.XXX ± 0.10
ANG ± 2°

照片框

ORDER INFORMATION

SSI-SRZ-2+24+2-LF
SERIES
LEADFREE
2+24+2 WAY
CLIP
DIP 90°
FEMALE

DESCRIPTION: POWER ACCESS RECEPTACLE 2P+24S+2P

