

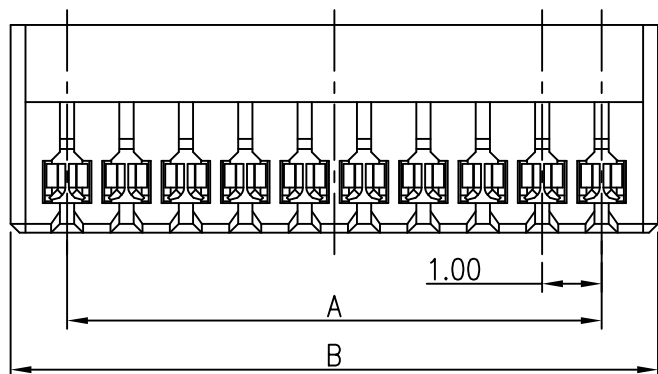
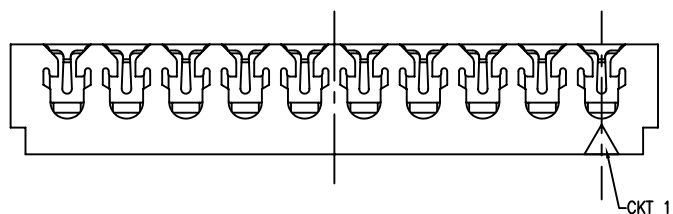
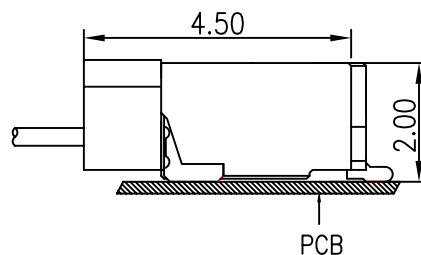


NOTES:
 1.MATERIAL:
 HOUSING:NYLON UL94V-0
 TERMINAL:PHOSPER BRONZE($t=0.12\text{mm}$)
 2.Applicable Wire: AWG #32(7×0.08)
 Insulation O.D.: 0.52 to 0.56mm

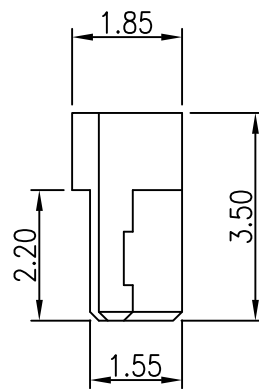

MATED CONDITION

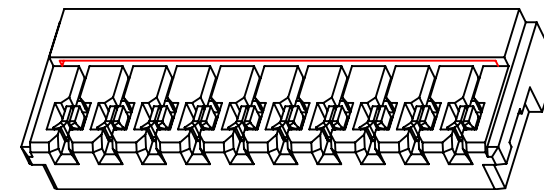

CKT	Dim A	Dim B
2	1.00	2.90
3	2.00	3.90
4	3.00	4.90
5	4.00	5.90
6	5.00	6.90
7	6.00	7.90
8	7.00	8.90
9	8.00	9.90
10	9.00	10.90
11	10.00	11.90
12	11.00	12.90
13	12.00	13.90
14	13.00	14.90
15	14.00	15.90
16	15.00	16.90
17	16.00	17.90
18	17.00	18.90
19	18.00	19.90
20	19.00	20.90

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, $\pm$
 .X $\pm$
 .XX $\pm$
 .XXX $\pm$
 ANG $\pm$

照片框

ORDER INFORMATION

SSR-HI32-xx-LF
 SERIES | T | LEADFREE
 | 02-20WAY
 | 32 AWG
 HOUSING / IDT

DESCRIPTION: 1.0mm Pitch IDC WTB Conn. CABLE SIDE