

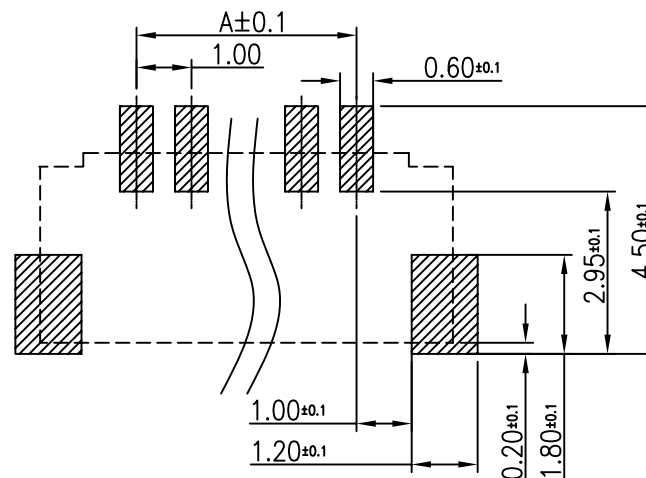


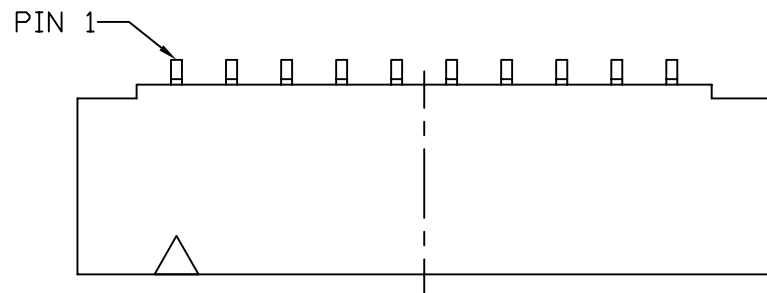



NOTES:

- 1.MATERIAL:
HOUSING:HOUSING:Halogen Free PLASTIC,
HIGH TEMP UL94V-0
TERMINAL:PHOSPER BRONZE(t=0.20)
FITTING NAIL:Bross(t=0.2)
Platng: Gold Flash (Lead Free)

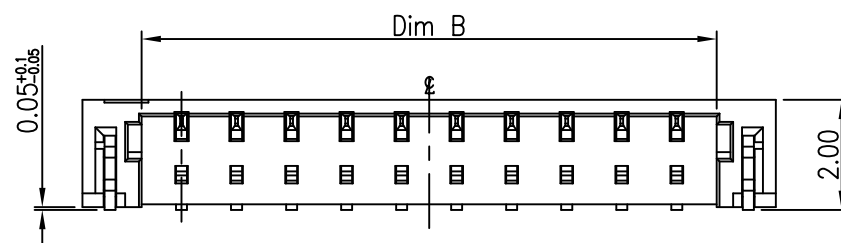


RECOMMENDED PCB LAYOUT
(GENERAL TOLERANCES±0.05)

CKT	Dim A	Dim B	Dim C
2	1.00	2.45	4.60
3	2.00	3.45	5.60
4	3.00	4.45	6.60
5	4.00	5.45	7.60
6	5.00	6.45	8.60
7	6.00	7.45	9.60
8	7.00	8.45	10.60
9	8.00	9.45	11.60
10	9.00	10.45	12.60
11	10.00	11.45	13.60
12	11.00	12.45	14.60
13	12.00	13.45	15.60
14	13.00	14.45	16.60
15	14.00	15.45	17.60
16	15.00	16.45	18.60
17	16.00	17.45	19.60
18	17.00	18.45	20.60
19	18.00	19.45	21.60
20	19.00	20.45	22.60

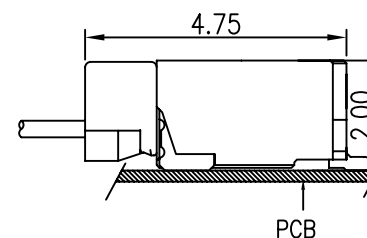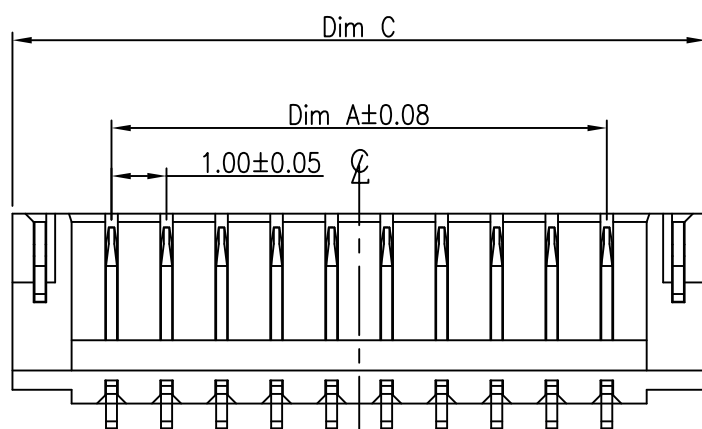

MATED CONDITION



RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.50

.X ± 0.25

.XX ± 0.15

.XXX ± 0.10

ANG ± 2°


PPOJECTION

照片框

ORDER INFORMATION

SSR-WR-xx-LF
SERIES | LEADFREE
02~20 WAY
REEL
90°SMT

DESCRIPTION: 1.0mm Pitch WTB SMT R/A TYPE

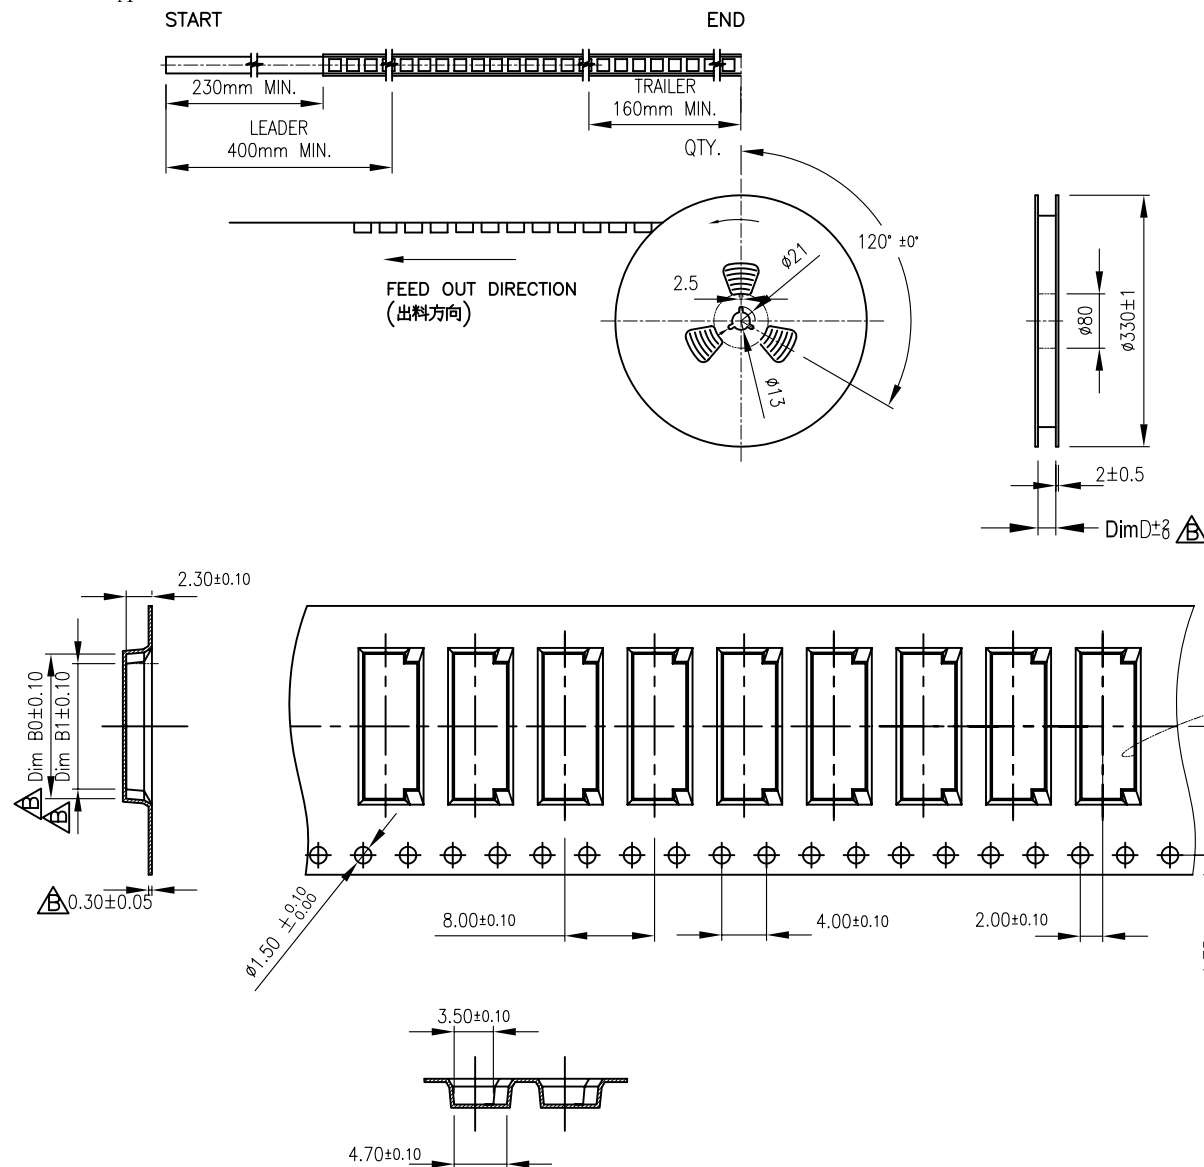

CKT.	Dim B0	Dim B1	Dim F	Dim C	Dim D
2	4.9	3.2	7.50	16.00	16.40
3	5.9	4.2			
4	6.9	5.2			
5	7.9	6.2			
6	8.9	7.2	11.5	24.00	24.40
7	9.9	8.2			
8	10.9	9.2			
9	11.9	10.2			
10	12.9	11.2			
11	13.9	12.2			
12	14.9	13.2			
13	15.9	14.2			
14	16.9	15.2			

- 1.Thickness: 0.30 ± 0.05 mm.
- 2.Packing lenght per 13" reel : 21 Meters.
- 3.Component load per 13" reel : 2500pcs.

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X ± 0.30

.X ± 0.15

.XX ± 0.05

.XXX ± 0.02

ANG ± 2°


PPOJECTION

照片框






ORDER INFORMATION

SSR-WR-xx-LF
SERIES T T LEADFREE
02~20 WAY
REEL
90°SMT

DESCRIPTION: 1.0mm Pitch WTB SMT R/A TYPE

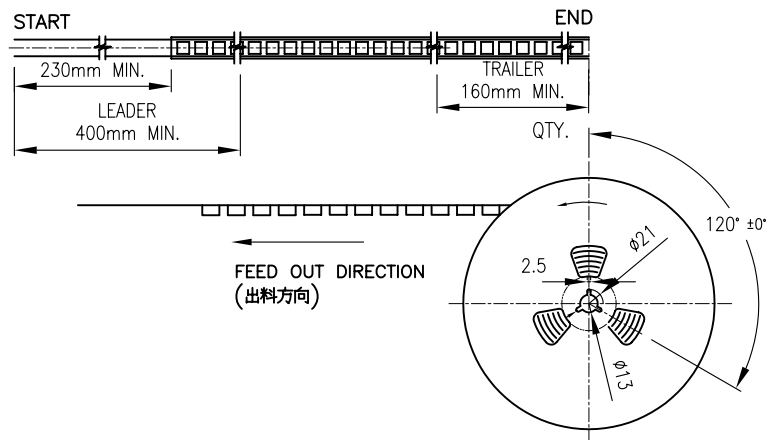

CKT.	Dim B0	Dim B1	Dim E	Dim F	Dim C	Dim D
15	17.9	16.2	28.40	14.20	32.00	32.40
16	18.9	17.2				
17	19.9	18.2				
18	20.9	19.2	40.40	20.20	44.00	44.40
19	21.9	20.2				
20	22.9	21.2				

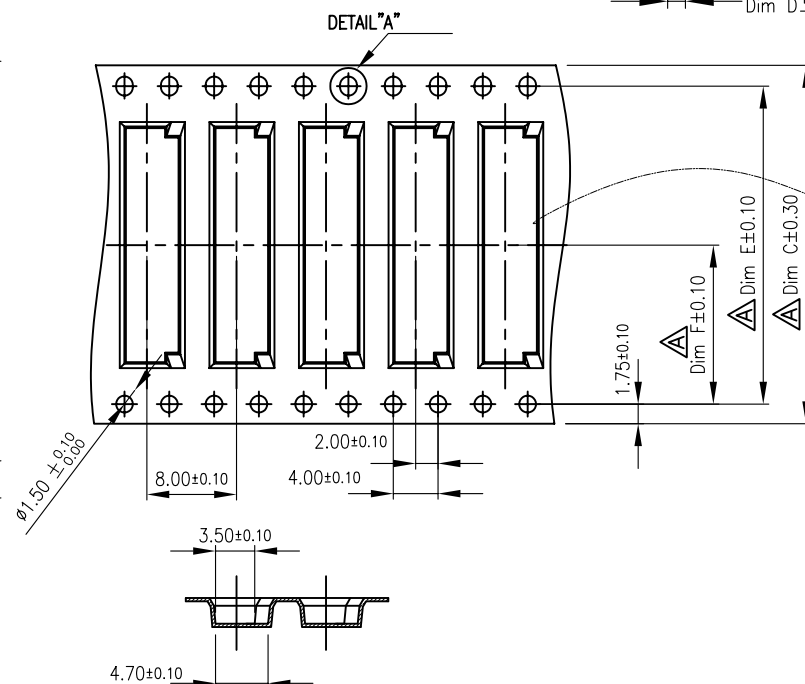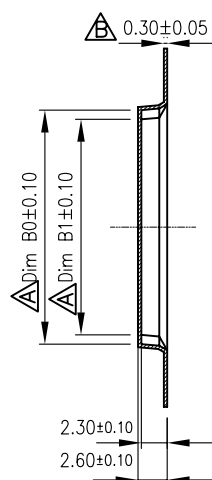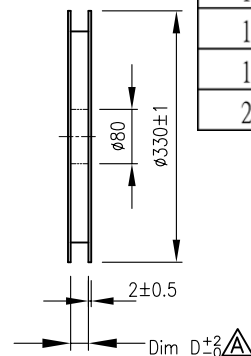

- 1.Thickness: 0.30 ± 0.05 mm.
- 2.Packing lenght per 13" reel : 21 Meters.
- 3.Component load per 13" reel : 2500pcs.

RoHS Compliant

TOLERANCES ARE

照片框

ORDER INFORMATION

SSR-WR-xx-LF
SERIES T T LEADFREE
02~20 WAY
REEL
90°SMT

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ± 0.30
X. ± 0.15
.XX ± 0.05
.XXX ± 0.02
ANG ± 2°

DESCRIPTION: 1.0mm Pitch WTB SMT R/A TYPE