
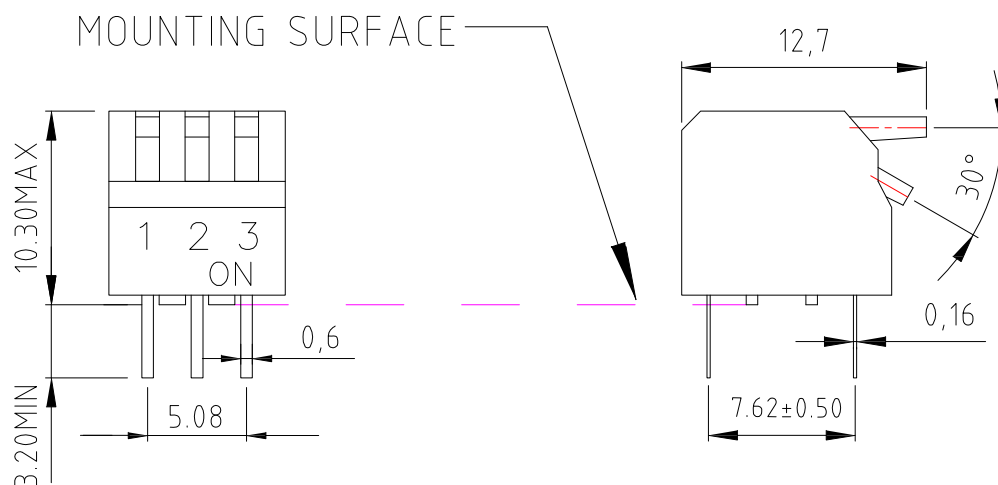
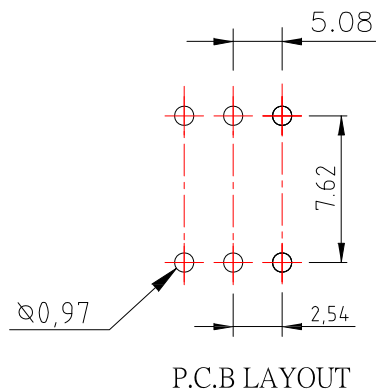


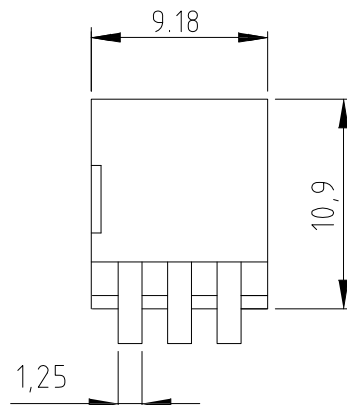

SPECIFICATIONS

1.ELECTRICAL

- 1.1 Electrical : 2,000 operations per switch-24 VDC , 25mA
- 1.2 Non-Switch Rating : 100mA , 50 VDC.
- 1.3 Switching Rating : 25 mA , 24 VDC.
- 1.4 Contact Resistance : 50mΩ max . at initial.

2.MECHANICAL

- 2.1 Mechanical life : 2,000 operations per swith.
- 2.2 Stroke : 2.0 mm .
- 2.3 Operation Temp : -20°C ~ 70°C.
- 2.4 Storage Temp : -40°C ~ 85°

3. MATERIAL

- 3.1 BASE : UL94V-0 , PBT Thermoplastic , Black .
- 3.2 COVER : UL94V-0 , PBT Thermoplastic , (Red 、 Black 、 Bule)
- 3.3 ACTUATORS : UL94V-0 , PBT Thermoplastic , White
- 3.4 CONTACT PLATING : Gold plating over Nickel
- 3.5 PITTING MATERIAL : Epoxy

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

PPOJECTION

照片框

ORDER INFORMATION

SW-Pcc-03-LF
SERIES T LEADFREE
03 WAY
RD:RED
BL:BLUE
BK:BLACK
PIANO

DESCRIPTION: DIP SWITCH