

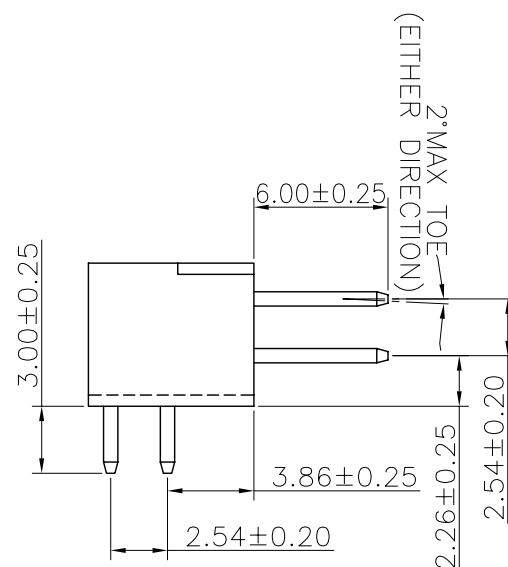


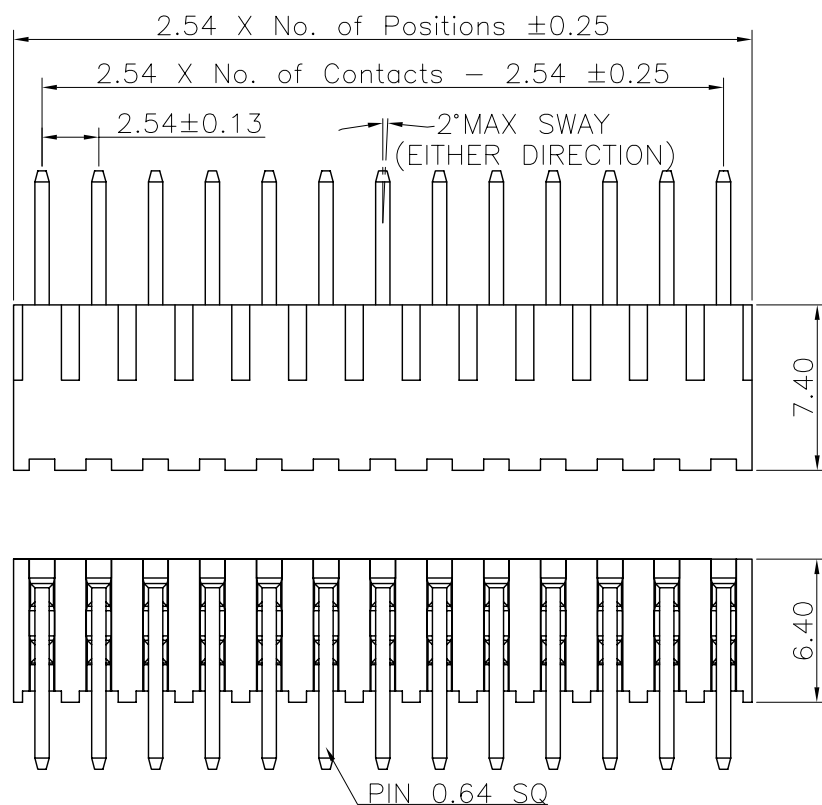

Recommended P.C.Board
Layout
(Tolerance:±0.05)



Specifications
Current Rating:3Amp
Insulation Resistance:1000MΩMin.
Dielectric Withstanding Voltage:600VAC
Contact Resistance:20mΩMax.
Operating Temperature:-40°C to +105°C
Materials
Contact Material: Brass
Insulator Material:Thermoplastic, UL 94V-0
PBT or the equivalent material

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES
煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

TOLERANCES ARE

X. ± 0.30


.X ± 0.25

.XX ± 0.15

.XXX ± 0.10

ANG ±

PPOJECTION



ORDER INFORMATION

T-R74-xx-LF
SERIES LEADFREE
02~40 WAY
LONG 7.4mm
DIP 90°

DESCRIPTION: 2.54 PIN HEADER DUAL ROWS R/A TYPE BASE 6.40H