


SPECIFICATIONS

SPECIFICATIONS

Rated: 20A 300VAC
 Insulation Withstands Voltage: AC 2000V/min
 Insulation Resistance: 1000MΩ or More at DC500V
 Using Temperature Range: -40 °C ~ +120 °C
 Screw Torque Value: 12 Kg-cm
 Wire Range Awg: 12 - 18 STR
 Insulator Body : Plastic NYLON 66 (UL 94V-0)
 Terminals: Brass, Tin Plated 0.8t
 Terminal Screws: M3.5 Nickel Plated Brass

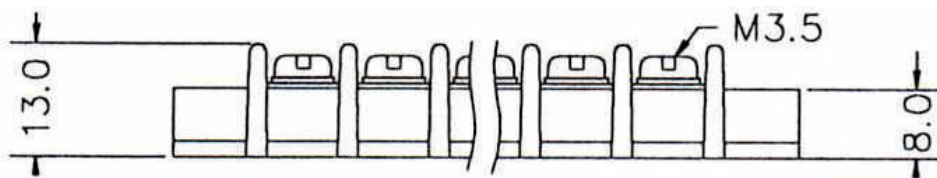

DIMENSION : ±0.8 PITCH 11.0mm

P數	2	3	4	5	6	7	8	9	10	11	12	13	14
A	33	44	55	66	77	88	99	110	121	132	143	154	165
B	41	52	63	74	85	96	107	118	129	140	151	162	173

P數	15	16	17	18	19	20	21	22	23	24	25	26
A	176	187	198	209	220	231	242	253	264	275	286	297
B	184	195	206	217	228	239	250	261	272	283	294	305

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1:1

DATE

SIZE A4

PJECTION

X.±
 .X±
 .XX±
 .XXX±
 ANG±



ORDER INFORMATION

TBA110-W-xx-LF
 SERIES | LEADFREE
 | 02-26WAY
 WIRE TO WIRE

DESCRIPTION: