

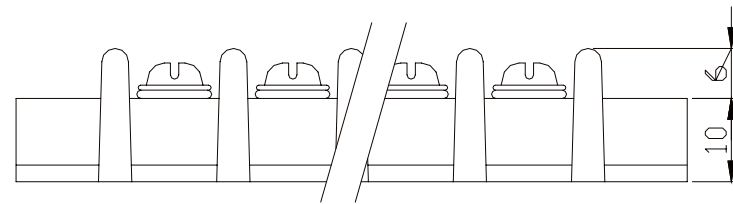


# SPECIFICATIONS

BARRIER MATERIAL : PHENOLIC BLACK  
 SCREW: NICKEL PLATED STEEL #8#32  
 WIRING : 10-18 STR.  
 RATING : 40 AMPERE 5.600 VAC  
 INSULATION WITHSTANDS VOLTAGE AC 2000V  
 INSULATION RESISTANCE 500M OR MORE AT DC 500V

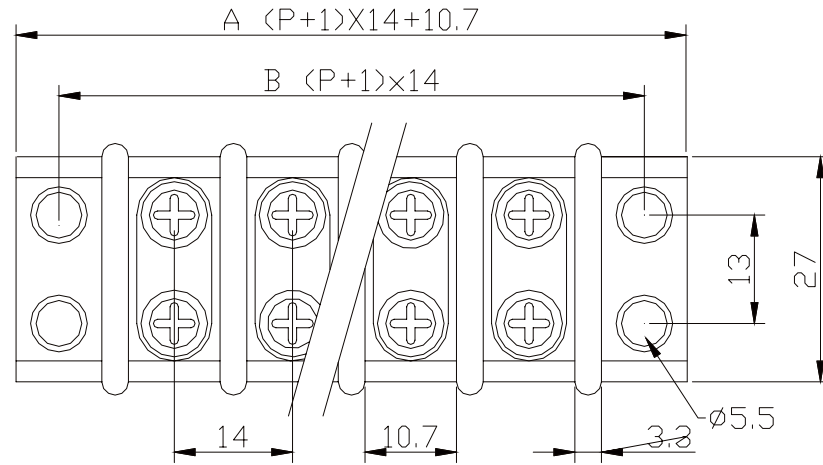

|      |       |       |       |       |       |       |       |       |       |       |       |       |       |       |
|------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| POLE | 2     | 3     | 4     | 5     | 6     | 7     | 8     | 9     | 10    | 11    | 12    | 13    | 14    | 15    |
| A    | 52.7  | 66.7  | 80.7  | 94.7  | 108.7 | 122.7 | 136.7 | 150.7 | 164.7 | 178.7 | 192.7 | 206.7 | 220.7 | 234.7 |
| B    | 42    | 56    | 70    | 84    | 98    | 112   | 126   | 140   | 154   | 168   | 182   | 196   | 210   | 224   |
| POLE | 16    | 17    | 18    | 19    | 20    | 21    | 22    | 23    | 24    |       |       |       |       |       |
| A    | 248.7 | 262.7 | 276.7 | 290.7 | 304.7 | 318.7 | 332.7 | 346.7 | 360.7 |       |       |       |       |       |
| B    | 238   | 252   | 266   | 280   | 294   | 308   | 322   | 336   | 350   |       |       |       |       |       |

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
 PCB CONNECTORS  
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1:1

DATE

SIZE A4

PJECTION

X. ±  
 .X ±  
 .XX ±  
 .XXX ±  
 ANG ±



ORDER INFORMATION

TBA140-W-xx-LF

SERIES

LEADFREE

02-24WAY

WIRE TO WIRE

DESCRIPTION: