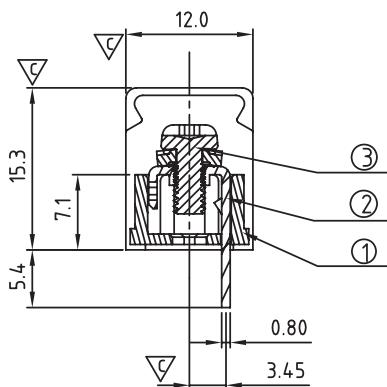
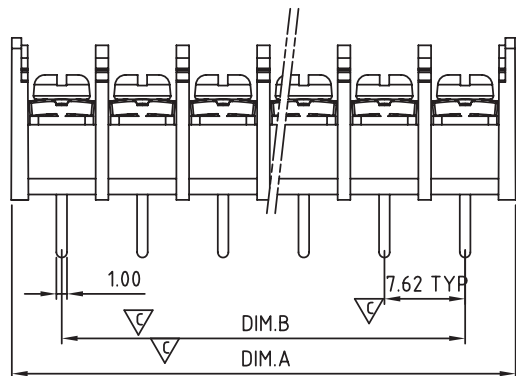
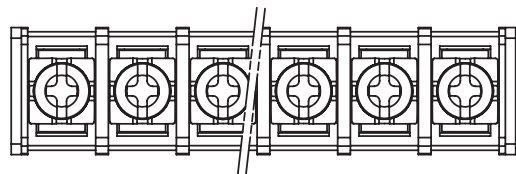


P.C.B LAYOUT(Top View)

MATERIALS ELECTRICAL

RATED VOLTAGE & CURRENT:

300 V, 15 A

WITHSTAND VOLTAGE:

AC 2000 V/Min

INSULATION RESISTANCE:

1000 MΩ OR MORE AT DC 500 V

△ OPERATING TEMPERATURE RANGE:

-40 °C ~ +115 °C

SCREW TORQUE VALUE:

5.2 Lb-In.

WIRE RANGE:

14 ~ 22 AWG

1) MOLDED PARTS:

THERMOPLASTIC, UL 94 V-0 BLACK

2) TERMINAL:

BRASS, 0.8t, Tin PLATED

△ 3) TERMINAL SCREWS:

STEEL, M3

△ APPROVAL:  us

Critical dimension: 

DIM		TOL			
		2P-4P	5P-10P	11P-16P	17P-20P
Dim A	(N-1)×7.62+9.54	±0.20	±0.30	±0.40	±0.50
Dim B	(N-1)×7.62	±0.20	±0.30	±0.40	±0.50

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.50
.XX ± 0.30
.XXX ± 0.10
ANG ± 1°

PPOJECTION 

照片框

ORDER INFORMATION

TBB076-DS-xx-LF

SERIES

LEADFREE

02~20WAY

SIDE

DIP 180°

DESCRIPTION: