
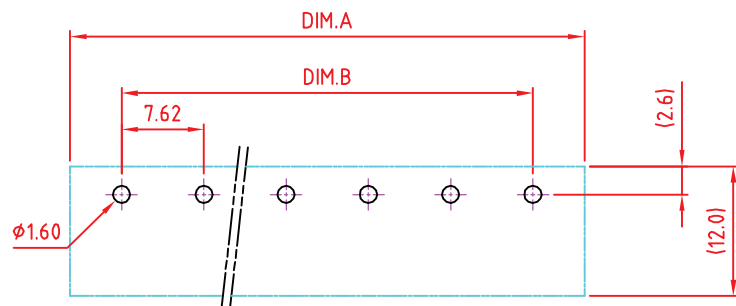
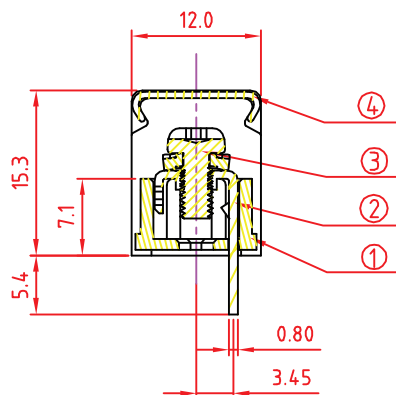
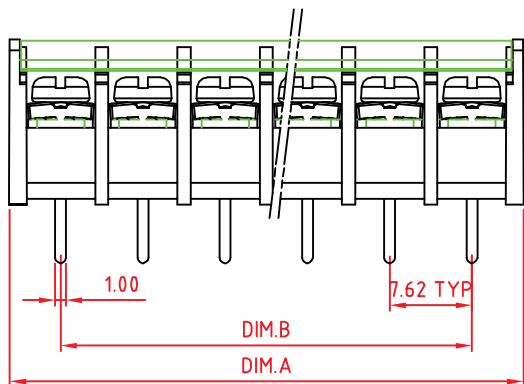


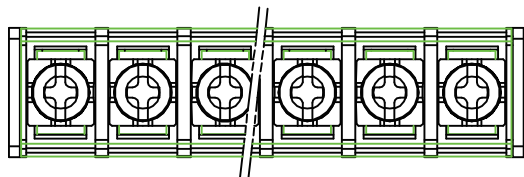

P.C.B LAYOUT

MATERIALS ELECTRICAL

RATED VOLTAGE & CURRENT:

300 V, 15 A

WITHSTAND VOLTAGE:

AC 2000 V/Min

INSULATION RESISTANCE:

1000 MΩ OR MORE AT DC 500 V

OPERATING TEMPERATURE RANGE:

-40 °C ~ +105 °C

SCREW TORQUE VALUE:

6.0Kgf.cm

WIRE RANGE:

14 ~ 22 AWG

1) MOLDED PARTS:

THERMOPLASTIC, UL 94 V-0 BLACK

2) TERMINAL:

BRASS, 0.8t, Tin PLATED

3) TERMINAL SCREWS:

STEEL, Ni PLATED, M3

4) COVER

TRANSPARENT, PVC

POLES	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
A	17.16	24.78	32.40	40.02	47.64	55.26	62.88	70.50	78.12	85.74	93.36	100.98	108.60	116.22	123.84
B	7.62	15.24	22.86	30.48	38.10	45.72	53.34	60.96	68.58	76.20	83.82	91.44	99.06	106.68	114.30
TOL	+0.20/-0.20				+0.30/-0.30					+0.40/-0.40					
POLES	17	18	19	20											
A	131.46	139.08	146.70	154.32											
B	121.92	129.54	137.16	144.78											
TOL	+0.50/-0.50														

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION


X. ±

.X ±

.XX ±

.XXX ±

ANG ±



ORDER INFORMATION

TBB076-DSC-xx-LF

SERIES

LEADFREE

02~32WAY

CAP

SIDE

DIP 180°

DESCRIPTION: