


SPECIFICATIONS

- ① Housing Material: Polyamide 66(UL94V-0), Black
- ② Screw: M3.5 Nickel Plated Steel
- ③ Terminals: Tin Plated Brass
- ④ Cover: PC Transparent

Screws Torque: 12 In-Lb
 Wire Range: 14~22 AWG
 Rated: 10 Amperes.AC250V
 Operation Temperature: -55°C~+95°C
 Insulation withstands volt: AC2000V min
 Insulation resistance: >1000MΩ or more at DC500V

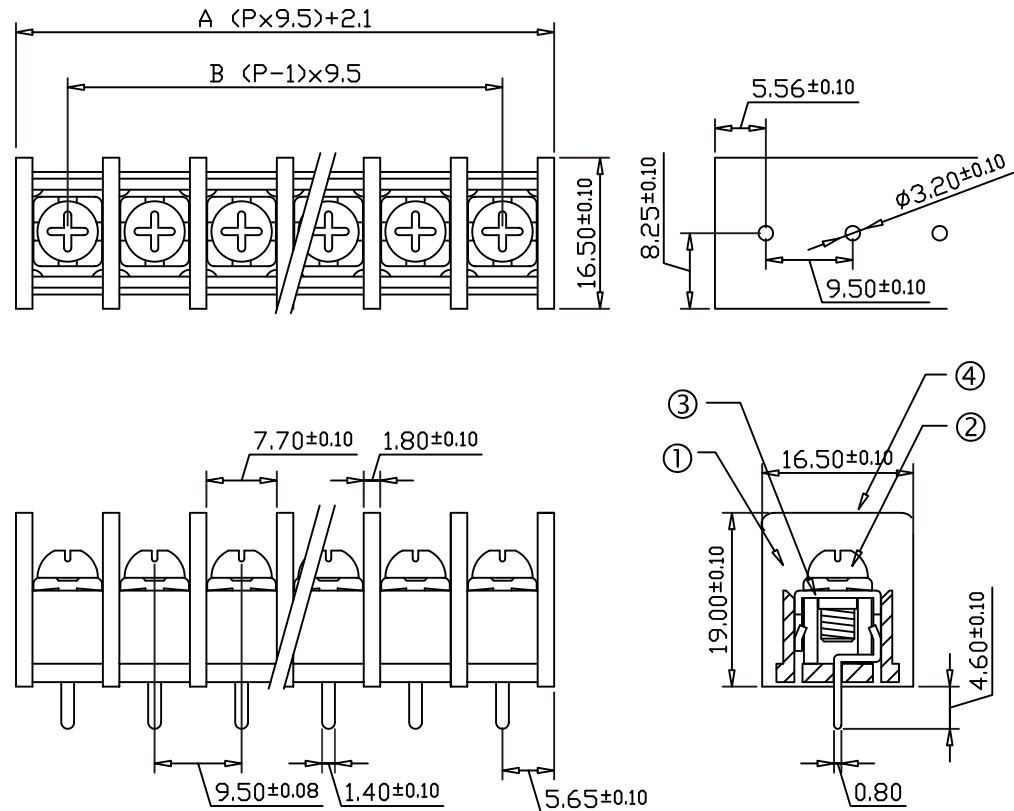

Tolerance ± 0.50

POLE	2	3	4	5	6	7	8	9	10	11	12	13	14	15			
A	21.1	30.6	40.1	49.6	59.1	68.6	78.1	87.6	97.1	106.6	116.1	125.6	135.1	144.6			
B	9.5	21.1	28.5	38	47.5	57	66.5	76	85.5	95	104.5	114	123.5	133			
POLE	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32
A	154.1	163.6	173.1	182.6	192.1	201.6	211.1	220.6	230.1	239.6	249.1	258.6	268.1	277.6	287.1	296.6	306.1
B	142.5	152	161.5	171	180.5	190	199.5	209	218.5	228	237.5	247	256.5	266	275.5	285	294.5

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS


UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X, ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±

P PROJECTION



ORDER INFORMATION

TBB095-D-xx-LF
 SERIES | LEADFREE
 02-32 WAY
 DIP 180°

DESCRIPTION: Barrier type terminal block

煜倫股份有限公司

www.morethanall.com