


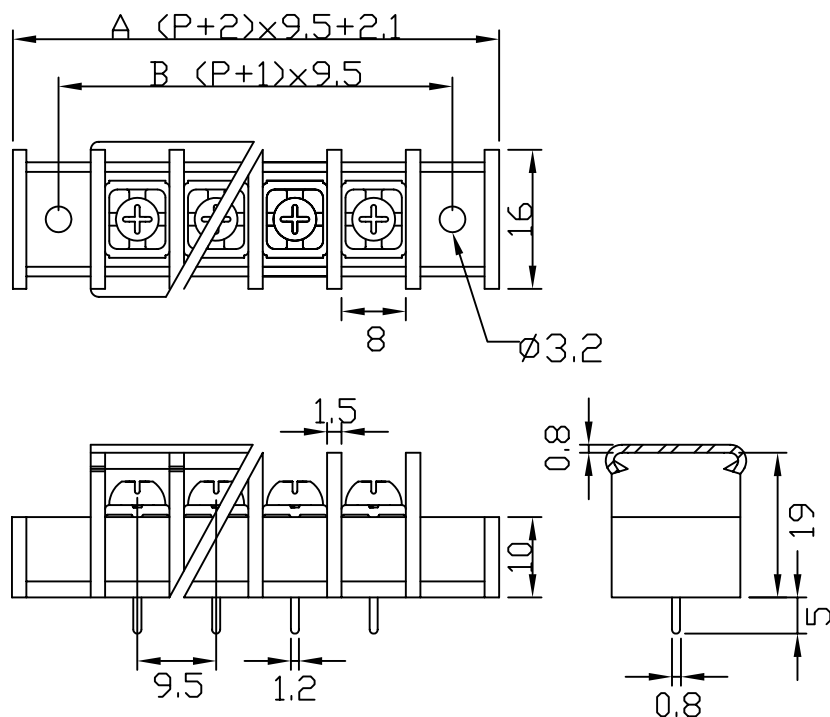

SPECIFICATIONS

BARRIER MATERIAL: THERMOPLASTIC (UL 94V-0).BLACK

TERMINALS: TIN PLATED BRASS

SCREWS: NICKEL PLATED STEEL

WIRE RANGE AWG: 14-22 STR

RATING: 10AMPERES.250VAC

INSULATION WITHSTANDS VOLTAGE AC 2000V

INSULATION RESISTANCE 500M OR MORE AT DC 500V

POLE	2	3	4	5	6	7	8	9	10	11	12	13	14	15			
A	40.1	49.6	59.1	68.6	78.1	87.6	97.1	106.6	116.1	125.6	135.1	144.6	154.1	163.6			
B	28.5	38	47.5	57	66.5	76	85.5	95	104.5	114	123.5	133	142.5	152			
POLE	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32
A	173.1	182.6	192.1	201.1	211.1	220.6	230.1	239.6	249.1	258.6	268.1	277.6	287.1	296.6	306.1	---	---
B	161.5	171	180.5	190	199.5	209	218.5	228	237.5	247	256.5	266	275.5	285	294.5	---	---

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

TBB095-DEC-xx-LF

SERIES LEADFREE
02~32WAY
CAP
EAR
DIP 180°

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: PITCH 9.5mm