


SPECIFICATIONS

- ① Housing Material: Polyamide 66(UL94V-0), Black
- ② Screw: M3.5 Nickel Plated Steel
- ③ Terminals: Tin Plated Brass
- ④ Cover: PC Transparent

Screws Torque: 12 In-Lb
Wire Range: 14~22 AWG
Rated: 10 Amperes.AC250V
Operation Temperature: -55°C~+95°C
Insulation withstands volt: AC2000V min
Insulation resistance: >1000MΩ or more at DC500V

Tolerance ± 0.50

POLE	2	3	4	5	6	7	8	9	10	11	12	13	14	15	
A	40.1	49.6	59.1	68.6	78.1	87.6	97.1	106.6	116.1	125.6	135.1	144.6	154.1	163.6	
B	28.5	38	47.5	57	66.5	76	85.5	95	104.5	114	123.5	133	142.5	152	
POLE	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30
A	173.1	182.6	192.1	201.6	211.1	220.6	230.1	239.6	249.1	258.6	268.1	277.6	287.1	296.6	306.1
B	161.5	171	180.5	190	199.5	209	218.5	228	237.5	247	256.5	266	275.5	285	294.5

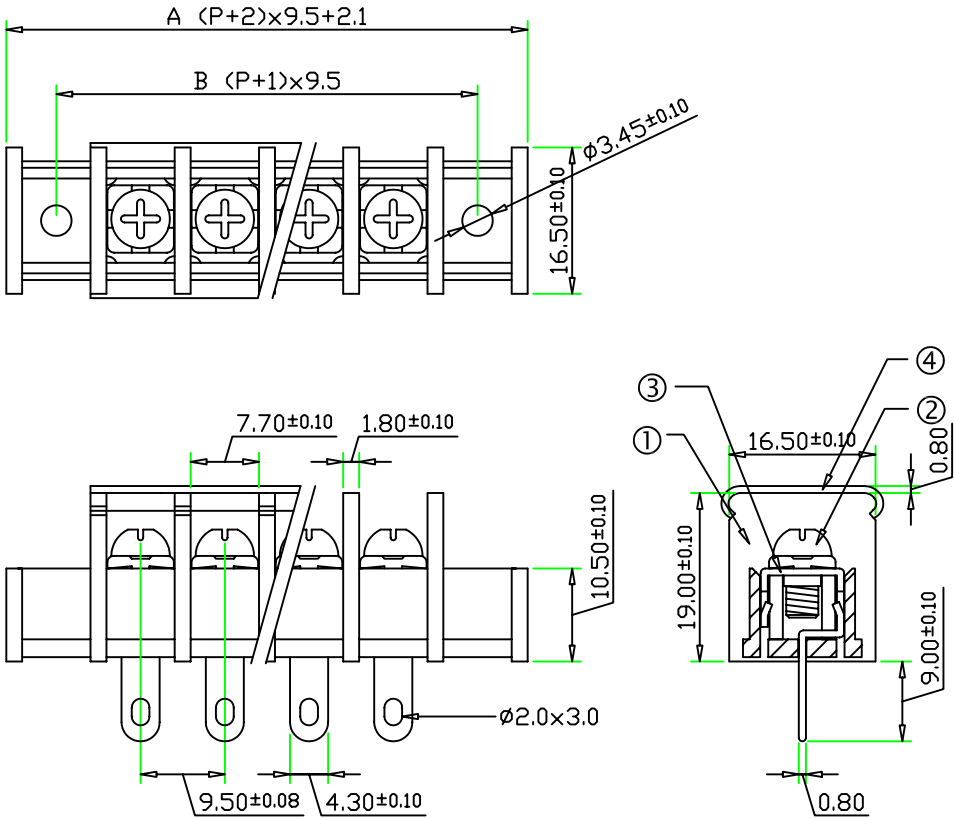

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ± 0.30
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ± 1°

照片框

ORDER INFORMATION

TBB095-SE09C-xx-LF

SERIES

LEADFREE

02~30WAY

CAP
9.0mm

EAR
SOLDER

DESCRIPTION: