

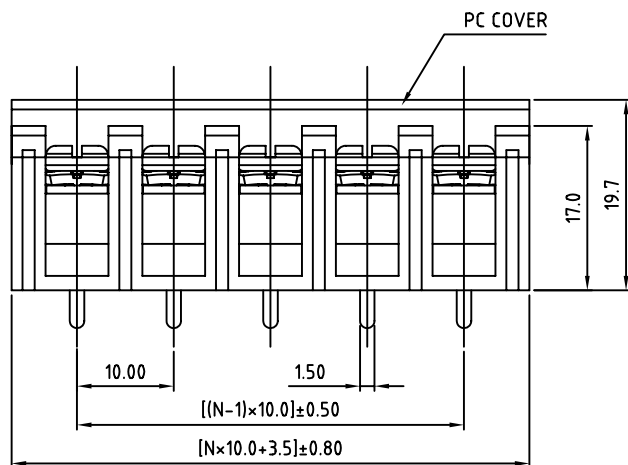
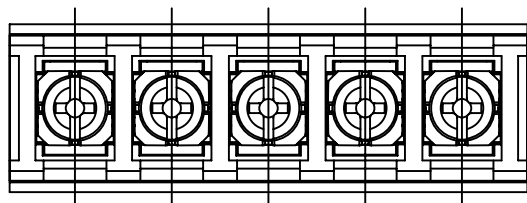


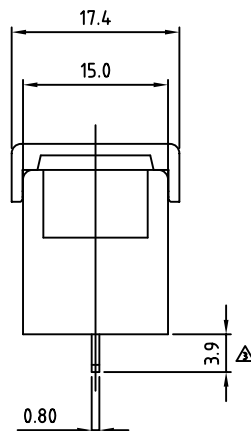

N=Number of contacts

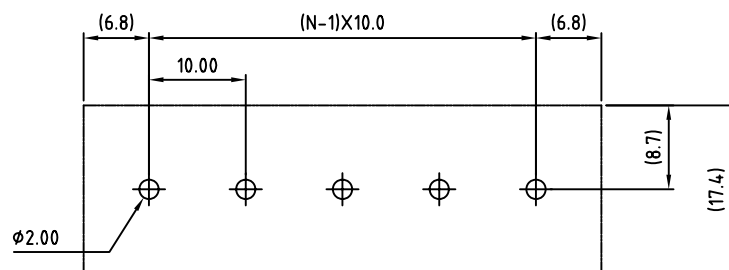

MATERIALS ELECTRICAL

RATED VOLTAGE & CURRENT:

300 V, 20 A

WITHSTAND VOLTAGE:

AC 2000 V/Min

INSULATION RESISTANCE:

1000 MΩ OR MORE AT DC 500 V

OPERATING TEMPERATURE RANG:

-40 °C ~ +115 °C

△ SCREW TORQUE VALUE:

12Lb-In.

△ WIRE RANGE:

22 - 12 AWG

1) MOLDED PARTS:

POLYIMIDE 66, UL 94 V-0 BLACK

2) TERMINAL:

BRASS, 0.8t, Tin PLATED

3) TERMINAL SCREWS:

STEEL, Ni PLATED, M3.5

4) COVER MATERIAL:

PC

△ APPROVAL: 

△ PART NO.:

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ±

PPOJECTION 

照片框

ORDER INFORMATION

TBB100-DC-xx-LF

SERIES

T

T

T

LEADFREE

02~32WAY

COVER

DIP 180°

DESCRIPTION: