


Section A-A

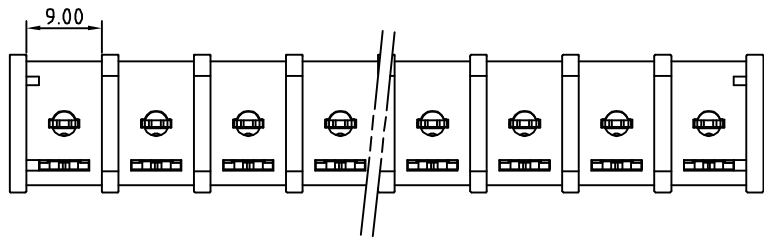

MATERIALS ELECTRICAL
 RATED VOLTAGE & CURRENT: 300 V, 30 A
 WITHSTAND VOLTAGE: AC 2000 V/Min
 INSULATION RESISTANCE: 1000 MΩ OR MORE AT DC 500 V
 OPERATING TEMPERATURE RANG: -40 °C ~ +115 °C
 SCREW TORQUE VALUE: 15 Kgf.cm
 WIRE RANGE: 22 - 10AWG
 1) BODY: THERMOPLASTICS, UL94-V0 BLACK
 2) TERMINAL: BRASS, 0.8t, Tin PLATED
 3) TERMINAL SCREWS WITH WASHER: STEEL, Ni PLATED, M4.0
 APPROVAL:

POLE		2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	
A		24	35	46	57	68	79	90	101	112	123	134	145	156	167	178	
B		11	22	33	44	55	66	77	88	99	110	121	132	143	154	165	
TOL		+/-0.10							+/-0.20								
POLE		17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32
A		189	200	211	222	233	244	255	266	277	288	299	310	321	332	343	354
B		176	187	198	209	220	231	242	253	264	275	286	297	308	319	330	341
TOL		+/-0.30							+/-0.40								

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

P PROJECTION

X, ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±



ORDER INFORMATION

TBB110-D-xx-LF

SERIES | LEADFREE
 02-32 WAY
 DIP 180°

DESCRIPTION: