


SPECIFICATIONS

Body Material: Polyamide 66 (UL 94V-0).Black
Terminals: Nickel Plated Brass
Screw: M4.0 Nickel Plated Steel
Wier Range:12~22 AWG
Rated: 25 Amperes.AC300V
Cover: PC Transparent
Insulation withstands volt: AC2000V min
Insulation resistance: >1000MΩ or more at DC500V

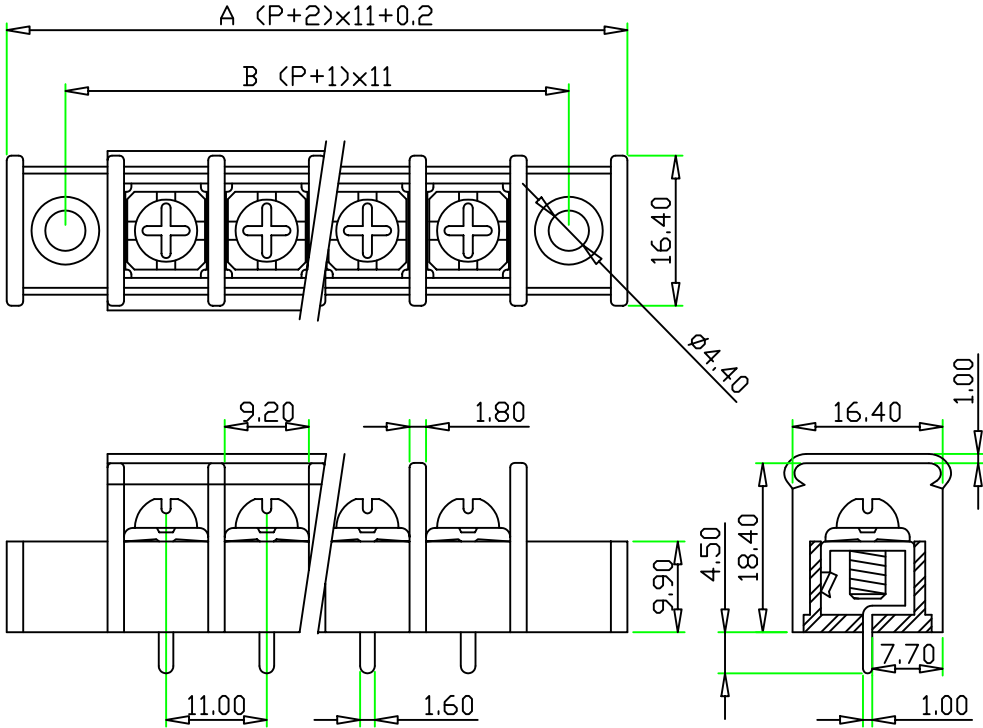

POLE	2	3	4	5	6	7	8	9	10	11	12	13	14	15	
A	44.2	55.2	66.2	77.2	88.2	99.2	110.2	121.2	132.2	143.2	154.2	165.2	176.2	187.2	
B	33	44	55	66	77	88	99	110	121	132	143	154	165	176	
POLE	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30
A	198.2	209.2	220.2	231.2	242.2	253.2	264.2	275.2	286.2	297.2	308.2	319.2	330.2	341.2	352.2
B	187	198	209	220	231	242	253	264	275	286	297	308	319	330	341

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

TBB110-DEx-xx-LF

SERIES

T

T

T

LEADFREE

02~30WAY

BLANK:NON COVER

C: COVER

EAR

DIP 180°

DESCRIPTION: