

SPECIFICATIONS

- ① Housing Material: Polyamide 66(UL94V-0), Black
- ② Screw: M4.0 Nickel Plated Steel
- ③ Terminals: Tin Plated Brass
- ④ Cover: PC Transparent

Screws Torque: 15.7 In-Lb




Wire Range: 12~22 AWG

Rated: 25 Amperes.AC300V

Operation Temperature: -55°C~+95°C

Insulation withstands volt: AC2000V min

Insulation resistance: >1000MΩ or more at DC500V

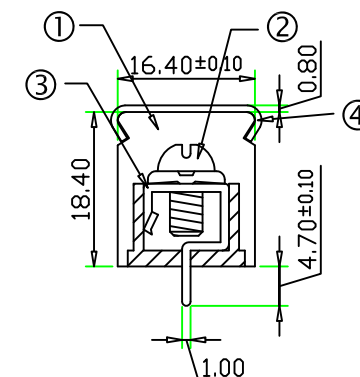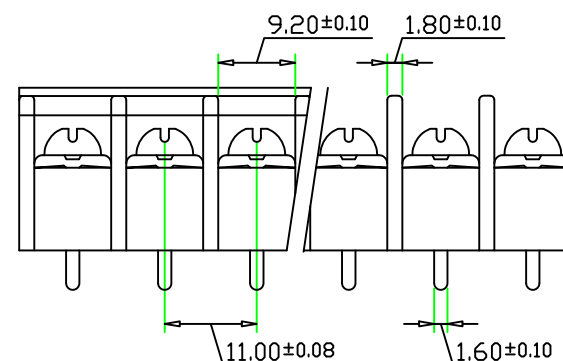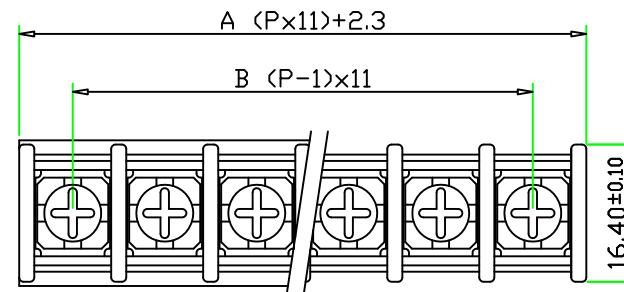

Tolerance ± 0.5

POLE	2	3	4	5	6	7	8	9	10	11	12	13	14	15			
A	24.3	35.3	46.3	57.3	68.3	79.3	90.3	101.3	112.3	123.3	134.3	145.3	156.3	167.3			
B	11	22	33	44	55	66	77	88	99	110	121	132	143	154			
POLE	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32
A	178.3	189.3	200.3	211.3	222.3	233.3	244.3	255.3	266.3	277.3	288.3	299.3	310.3	321.3	332.3	343.3	354.3
B	165	176	187	198	209	220	231	242	253	264	264	264	264	264	264	264	264

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

TOLERANCES ARE

X, $\pm$

.X $\pm$

.XX $\pm$

.XXX $\pm$

ANG $\pm$

照片框

ORDER INFORMATION

TBB110-Dx-xx-LF

SERIES

LEADFREE

02~32WAY

BLANK:NON COVER

C: COVER

DIP 180°

DESCRIPTION: Barrier type terminal block