


**SPECIFICATIONS**  
**BARRIER MATERIAL: THERMOPLASTIC (UL 94V-0).BLACK**  
**TERMINALS TIN PLATED BRASS**  
**CREWNICKEL PLATED STEEL**  
**WIRE RANGE 14-22 STRA**  
**RATING: 10AMPRES. 250 VAC**  
**INSULATION WITHSTANDS VOLTAGE AC 2000V**  
**NSULATION RESISTANCE 500M OR MORE AT DC 500V**

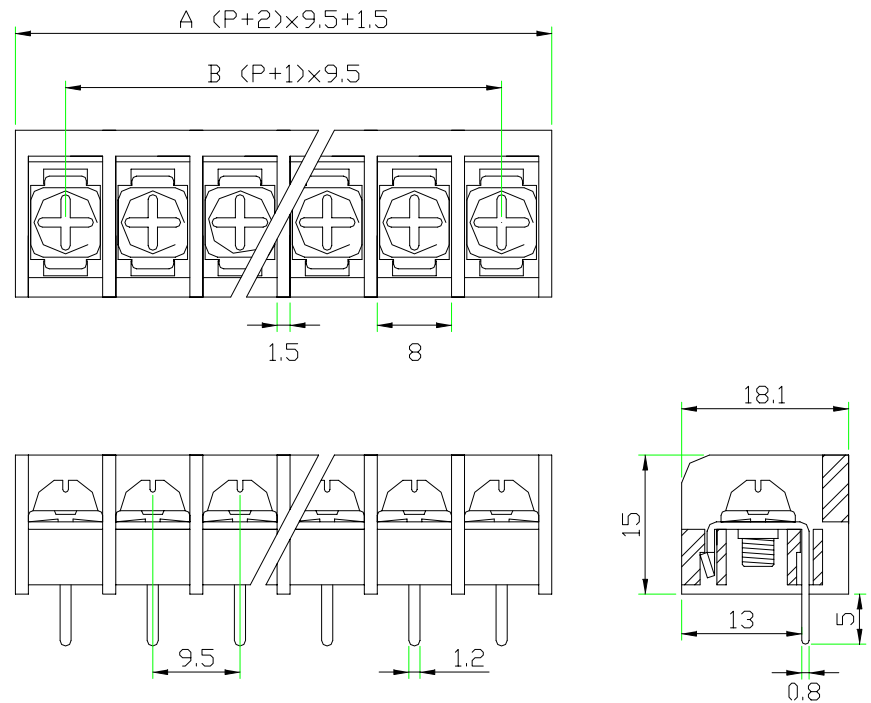

POLE	2	3	4	5	6	7	8	9	10	11	12	13	14	15			
A	20.5	30	39.5	49	58.5	68	77.5	87	96.5	106	115.5	125	134.5	144			
B	9.5	19	28.5	38	47.5	57	66.5	76	85.5	95	104.5	114	123.5	133			
POLE	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32
A	153.5	163	172.5	182	191.5	201	210.5	220	229.5	239	248.5	258	267.5	277	286.5	296	305.5
B	142.5	152	161.5	171	180.5	190	199.5	209	218.5	228	237.5	247	256.5	266	275.5	285	294.5

**RoHS Compliant**

TOLERANCES ARE

**MORETHANALL**  
 PCB CONNECTORS  
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4 PPROJECTION

X, ±  
 .X ±  
 .XX ±  
 .XXX ±  
 ANG ±



**ORDER INFORMATION**

TBC095-D-xx-LF  
 SERIES | LEADFREE  
 02~32WAY  
 DIP 180°

DESCRIPTION: