

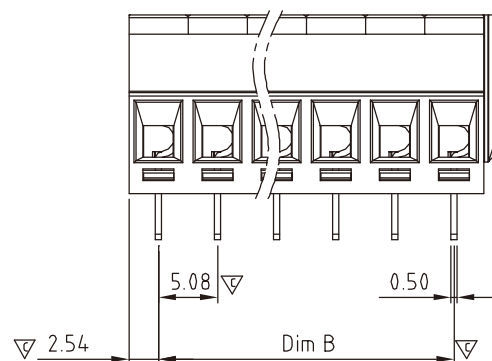
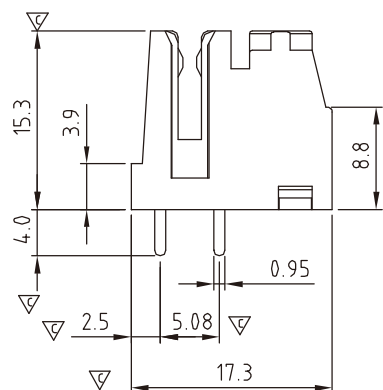


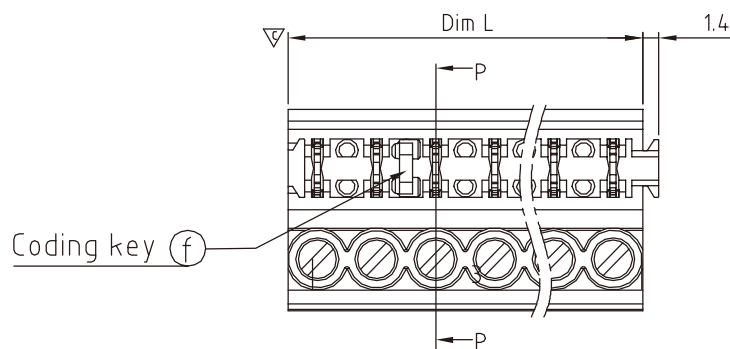

Material

- Item a Terminal body: Thermoplastic (UL94V-0)
- Item b Terminal cover: Thermoplastic (UL94V-0)
- Item c Terminal screw: Steel Zinc plating "-" slot type
- Item d Clamp: Zinc alloy, Ni plated
- Item e Male contact pin: PhBz, Tin plated
- Item f Coding key: PC, Yellow

Electrical

- Voltage rating: 300VAC
- Current rating: 10A
- Solid wire: 14-24 AWG
- Stranded wire: 14-24 AWG
- Torque: 4.5 Lb-In
- Screw: M3
- Wire strip length: 6-7mm
- Withstanding Voltage: 1.6KV
- Operating temperature: -40°C to +115°C
- Critical dimension: ▽

N = Number of poles

Dim L = N x 5.08

Dim B = (N-1) x 5.08

Poles	Tolerance
3P-6P	±0.15
7P-12P	±0.25
13P-18P	±0.35
19P-24P	±0.40

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

X. ± 0.50

.X ± 0.30

.XX ± 0.10

.XXX ±

ANG ± 1°

PPOJECTION

照片框

ORDER INFORMATION

TBE051-D-xx-LF

SERIES

LEADFREE

03-24 WAY

DIP 180°

DESCRIPTION: