

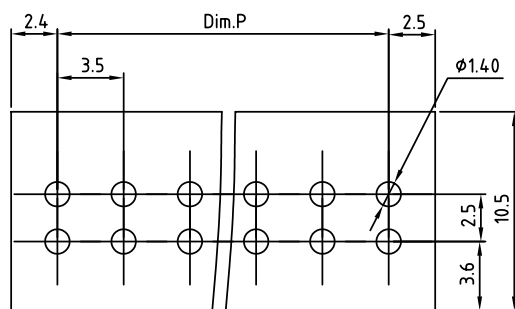
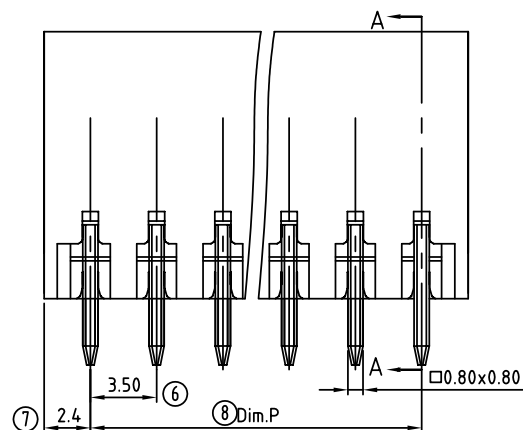


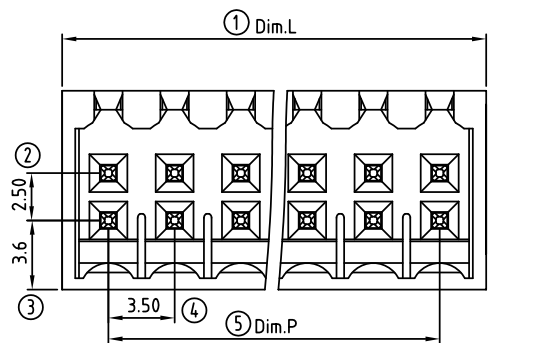

P.C.B Layout

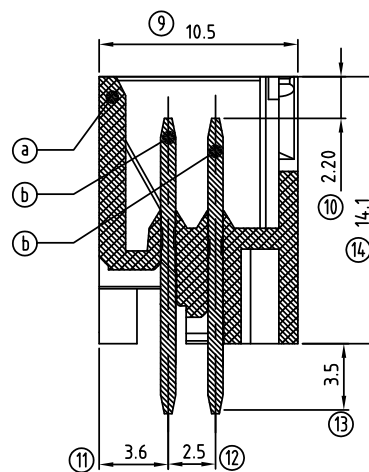

SECTION A-A

Material:

- Item ③ Terminal housing: Thermoplastic (UL94V-0)
- Item ⑥ Male contact pin: Copper Tin plated

Electrical: cULus

- Voltage rating: 150V
- Current rating: 7A
- Withstanding Voltage: 1.3KV
- Operating temperature: -40°C to +115°C
- Soldering temperature: 250°C±10°C/5 Sec
- Safety Approval:

$$\text{Dim.L} = (N/2 - 1) \times 3.5 + 4.9$$

$$\text{Dim.P} = (N/2 - 1) \times 3.5$$

N=Number of poles

POLES	Dim. Tol	Dim.L	Dim.P
2x2p-2x6p		±0.15	±0.10
2x7p-2x12p		±0.25	±0.20
2x13p-2x18p		±0.35	±0.30
2x19p-2x24p		±0.40	±0.35

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

TBH035-PDB-2Xxx-LF

SERIES

LEADFREE

2X02:04WAY
2X24:48WAY

BOX
DIP 180°
MALE

DESCRIPTION: