

Technical Data:

Material:

- Solder Pin: Brass with Tin plated
- Insulator body(housing): Polyamide(Glass filled)(UL94V-0)




Electrical

- Voltage rating: 125VAC
- Current rating: 8A.
- Insulation resistance: 500M Ω at DC 500V
- Withstanding Voltage: AC 1200V(1min)

Mechanical:


- Using temperature Range: -40°C to +105°C
- Soldering temperature: +250°, 5seconds Max.

Safety approval deta: 

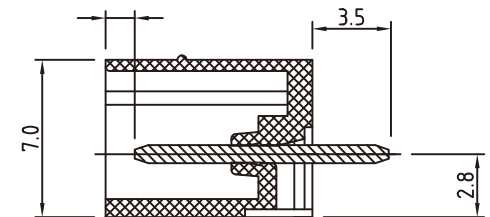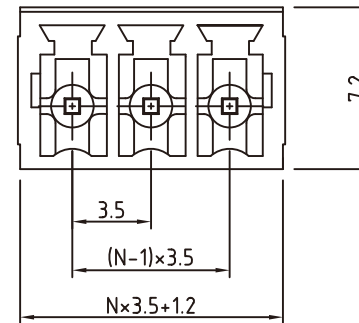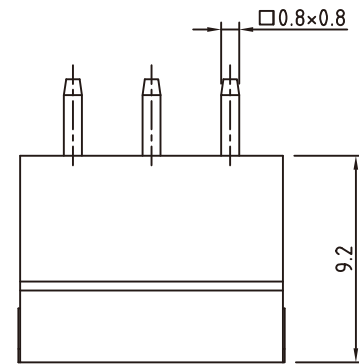

N=Number of contacts

P.C.B. LAYOUT

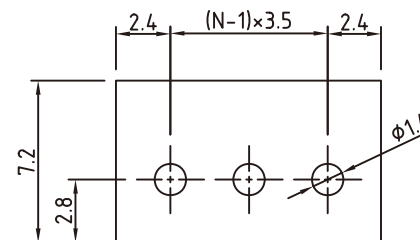

照片框

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION 

X. $\pm$
.X $\pm$ 0.30
.XX $\pm$ 0.10
.XXX $\pm$
ANG $\pm$

ORDER INFORMATION

TBH035-PDCBL-xx-LF

SERIES

LEADFREE

02~24WAY

BLUE

CAGE

DIP 180°

MALE

DESCRIPTION: