


SPECIFICATIONS

- ① Housing Material: Polyamide 66(UL94V-0), Green
- ② Screw: M2.0 Yellow Zinc Plated Steel
- ③ Wire Clamp: Nickel Plated Brass
- ④ Contact: Tin Plated Phosphorus Bronze

Screws Torque: 1 In-Lb
Wier Range: 16~28 AWG
Rated: 8 Amperes.AC300V
Operation Temperature: -55°C~+115°C
Insulation withstands volt: AC2000V min
Insulation resistance: >1000MΩ or more at DC500V

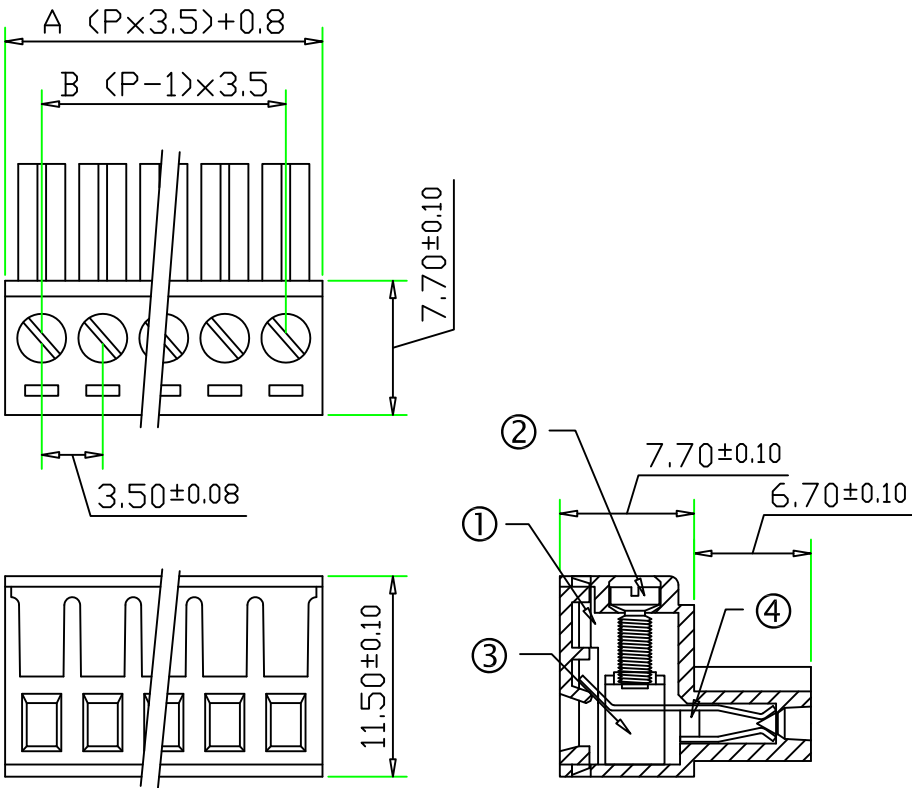

Tolerance ± 0.50

POLE	2	3	4	5	6	7	8	9	10	11	12	
A	7.8	11.3	14.8	18.3	21.8	25.3	28.8	32.3	35.8	39.3	42.8	
B	3.5	7	10.5	14	17.5	21	24.5	28	31.5	35	38.5	
POLE	13	14	15	16	17	18	19	20	21	22	23	24
A	46.3	49.8	53.3	56.8	60.3	63.8	67.3	70.8	74.3	77.8	81.3	84.8
B	42	45.5	49	52.5	56	59.5	63	66.5	70	73.5	77	80.5

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, $\pm$
.X $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$

照片框

ORDER INFORMATION

TBH035-SWC-xx-LF

SERIES

LEADFREE

02~24WAY

CAGE

SCREW WIRE

FEMALE

DESCRIPTION: Pluggable type terminal block