
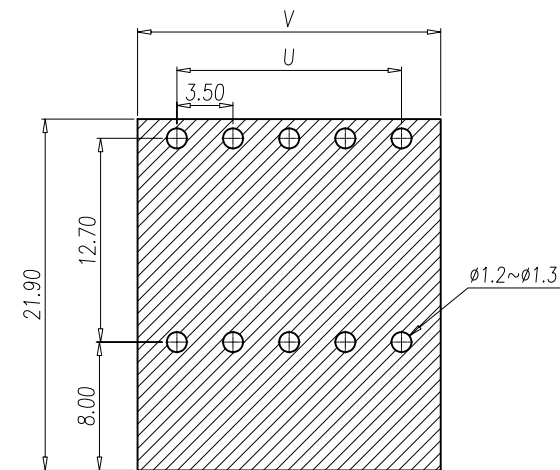
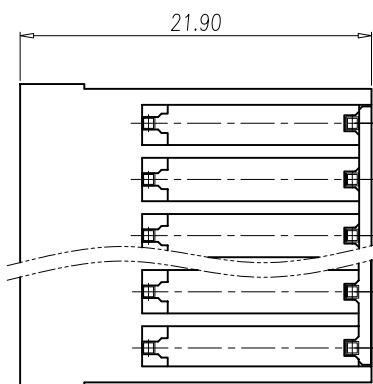
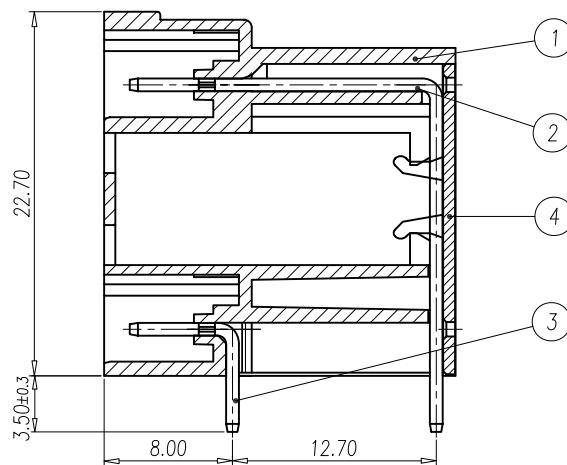


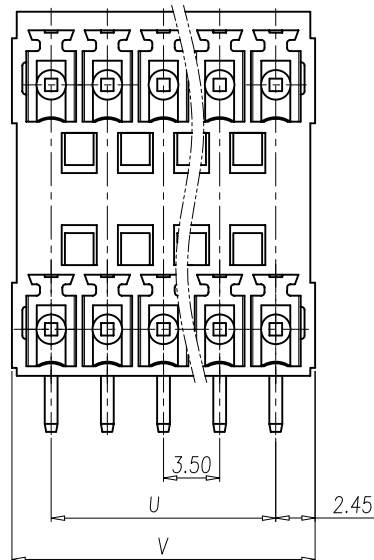

P.C.B. LAYOUT (S=3:1)

Normal Geometric Tolerancing				
—	//	≡	⊥	
0 to 100	0.2		0 to 10	0.2
over 100 to 150	0.3	0.3	over 10	0.3
over 150	0.5			
Total Pitch Tolerances		Normal dimension Tolerances		
0<U<=30	±0.20	0~30	±0.25	
30<U<=53	±0.25	over 30~53	±0.30	
53<U<=70	±0.30	over 53~70	±0.35	
70<U<=90	±0.35	over 70~90	±0.44	
90<U<=115	±0.44	over 90~115	±0.55	
115<U<=150	±0.55	over 115~150	±0.70	
150<U<=200	±0.70	over 150~200	±0.85	
200<U<=250	±0.85	over 200~250	±1.00	
250<U<=320	±1.00	over 250~320	±1.20	

NOTES:

1. Rating: 300V 8A

PITCH: 3.50mm

2. Insulation Withstands Voltage:

AC 2000V at 1 minute

3. Insulation Resistance:

1000MΩ or more at DC500V

4. Using Temperature Range:

-40°C ~ +130°C

4	END COVER	PBT	UL94V-0 GREEN
3	SOLDER PIN2	COPPER ALLOY	Tin Plated
2	SOLDER PIN1	COPPER ALLOY	Tin Plated
1	HOUSING	PBT	UL94V-0 GREEN
ITEM	NAME OF PART	MATERIAL	NOTES

P	4	6	8	10	12	14	16	18	20	22	24	26	28	30	32	34	36	38	40	42	44
U	3.5	7.0	10.5	14.0	17.5	21.0	24.5	28.0	31.5	35.0	38.5	42.0	45.5	49.0	52.5	56.0	59.5	63.0	66.5	70.0	73.5
V	8.4	11.9	15.4	18.9	22.4	25.9	29.4	32.9	36.4	39.9	43.4	46.9	50.4	53.9	57.4	60.9	64.4	67.9	71.4	74.9	78.4

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

TBH035B1-PRC05-xx-LF

SERIES

MALE

0.5"

CAGE

DIP 90°

LEADFREE

04:04PIN PER ROW

44:44PIN PER ROW

DESCRIPTION: