

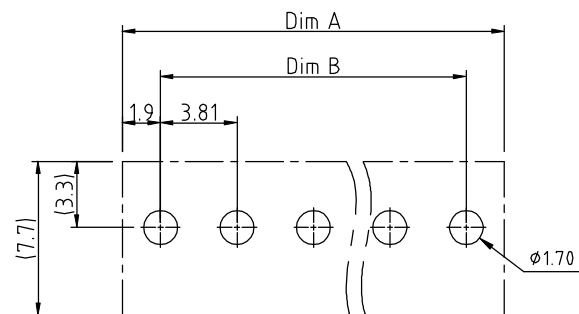
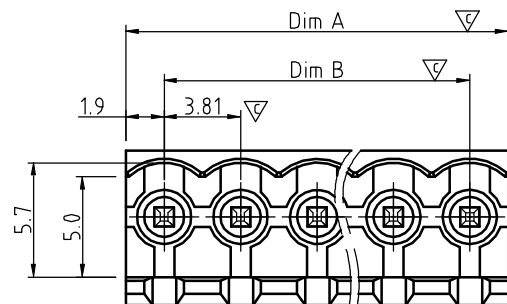


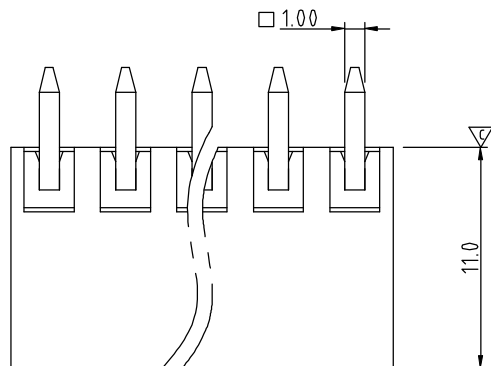

RECOMMENDED PCB LAYOUT

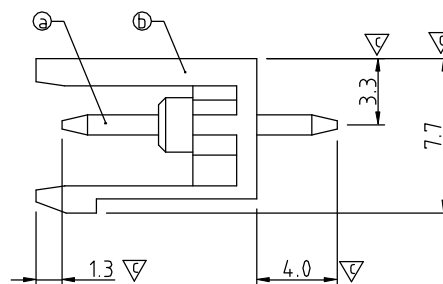

Material:

- Item ③ Contact pin: Copper Tin plated
- Item ④ Terminal(housing): Thermoplastic (UL94V-0)

Electrical: cULus

- Voltage rating: 300V
- Current rating: 8A
- Withstanding Voltage: 1.6 KV
- Operating temperature: -40°C to +115°C
- Soldering temperature: 260°C±5°C/5 Sec
- Safety Approval: cULus
- Critical dimension: ▽

DIMENSION

Dim A	N×3.81
Dim B	(N-1)×3.81

N= NUMBER OF POLES

Poles	Tolerance
2P-5P	±0.15
6P-10P	±0.20
11P-15P	±0.25
16P-20P	±0.30
21P-24P	±0.35

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.50

.X ± 0.30

.XX ± 0.10

.XXX ±

ANG ± 1°

PPOJECTION

照片框

ORDER INFORMATION

TBH038-PD-xx-LF

SERIES

T

T

T

T

T

T

T

T

T

T

T

T

T

T

T

T

T

T

02~24WAY

DIP 180°

MALE

DESCRIPTION: