

Technical Data:

Material:

- Solder Pin: Brass with Tin plated
- Insulator body(housing): Polyamide(Glass filled)(UL94V-0)



Electrical

- Voltage rating: 125VAC
- Current rating: 8A.
- Insulation resistance: 500M Ω at DC 500V
- Withstanding Voltage: AC 1200V(1min)


Mechanical:

- Using temperature Range: -40°C to +105°C
- Soldering temperature:+250°,5seconds Max.


Safety approval data: 

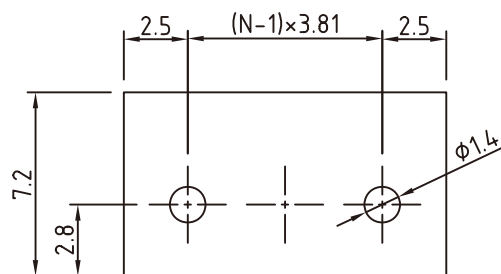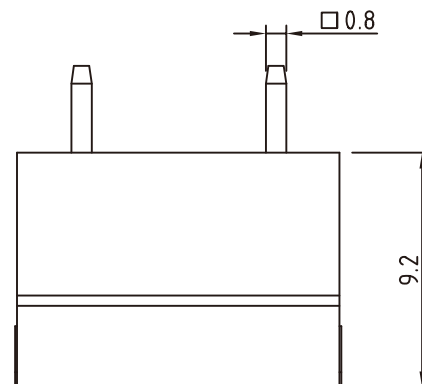

P.C.B. LAYOUT

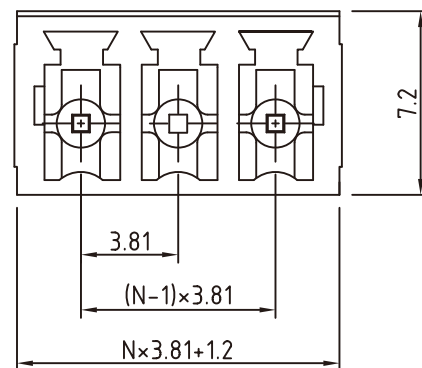

N=Number of contacts

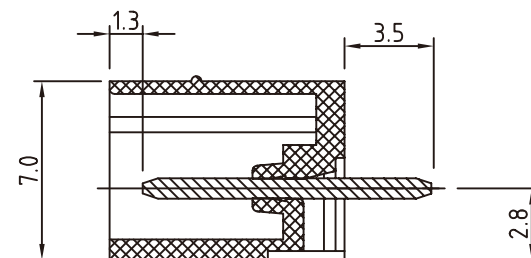

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

TOLERANCES ARE

X. $\pm$


.X $\pm$

.XX $\pm$

.XXX $\pm$

ANG $\pm$

P PROJECTION 



ORDER INFORMATION

TBH038-PDCEE-xxyy-LF

SERIES

MALE

CAGE

DIP 180°

EMPTY EVEN PIN

LEADFREE

0704:7P4C

DESCRIPTION: