
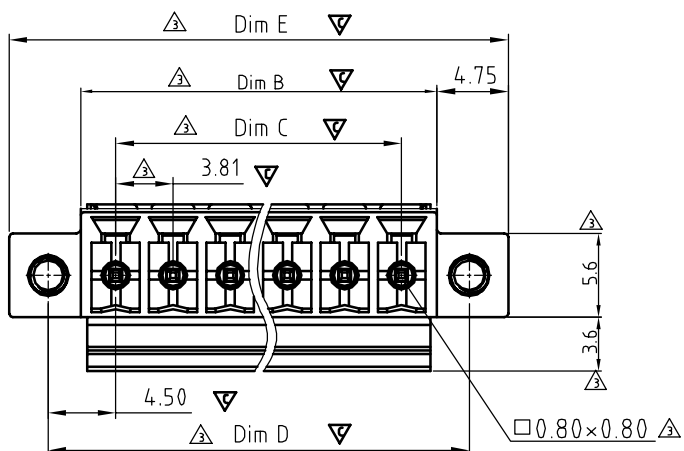
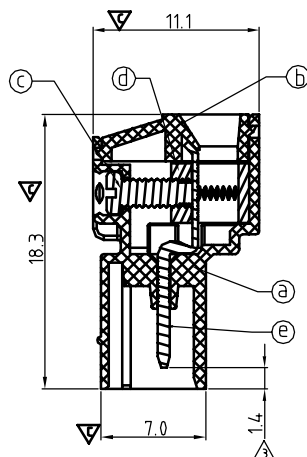
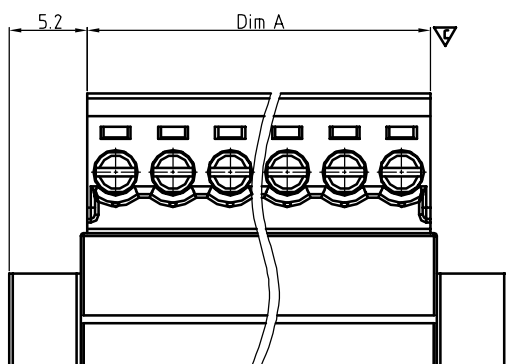


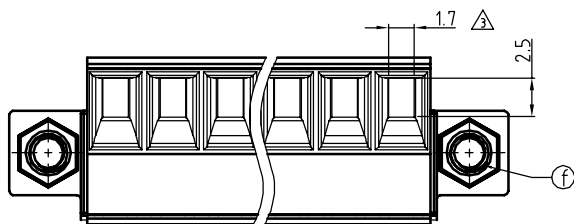

Material

- Item (a) Terminal (Body): Thermoplastic (UL94V-0)
- Item (b) Terminal (Cover): Thermoplastic (UL94V-0)
- Item (c) Terminal screw: Steel Zinc plating "-" slot type
- Item (d) Clamp: Brass (CuZn) Ni plating
- Item (e) Contact Pin: Brass, Tin plated
- Item (f) Flange nut: Brass

Electrical cULus

- Voltage rating: 300VAC
- Current rating: 8A
- Solid wire (AWG): 14-30
- Stranded wire (AWG): 14-30
- Torque (Lb-In): 2.6
- Screw: M2
- Wire strip length: 7mm
- Withstanding Voltage: 1.6KV
- Operating temperature: -40°C to +115°C

- Safety Approval: us

- Critical dimension:

Dimension

Dim A	N×3.81
Dim B	N×3.81+0.88
Dim C	(N-1)×3.81
Dim D	(N-1)×3.81+9.0
Dim E	N×3.81+10.40

N=Number of poles

POLES	Tolerance
2p-6p	±0.15
7p-13p	±0.20
14p-18p	±0.30
19p-24p	±0.40

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

X. ± 0.50

.X ± 0.30

.XX ± 0.10

.XXX ±

ANG ± 1°

PPOJECTION

照片框

ORDER INFORMATION

TBH038-PWCF-xx-LF

SERIES
LEADFREE
02-24WAY
FLANGE
CAGE
SCREW 90°
MALE

DESCRIPTION: