

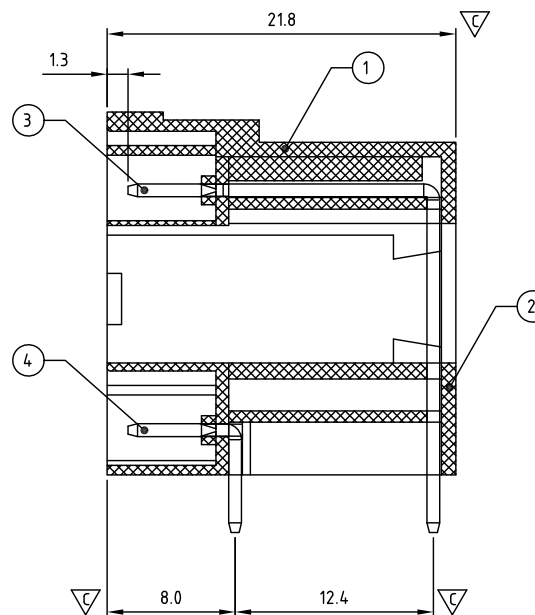


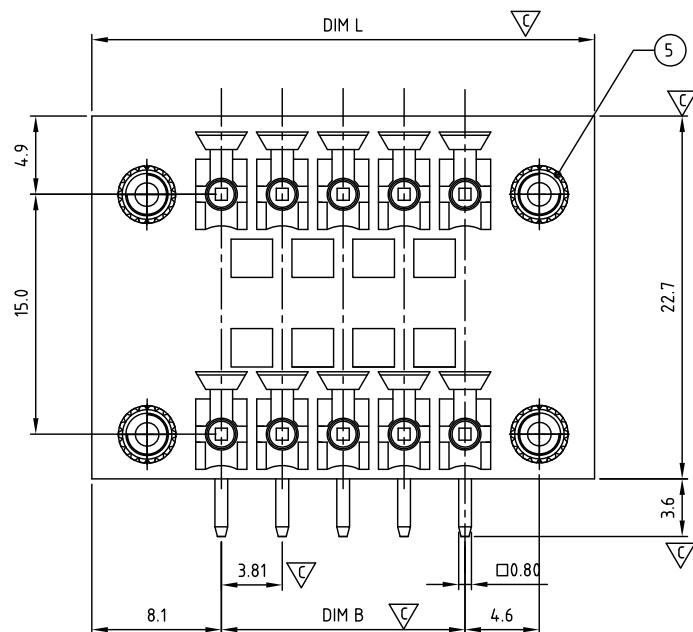

Technical data

- 1.Nominal voltage: 300V/8A
PITCH:3.81mm
- 2.Insulation Withstands Voltage:
AC 1600V/MIN
- 3.Insulation Resistance:
1000MΩ or more at DC500V
- 4.Using temperature range:-40°C ~115°C
- 5.Soldering temperature range:250°C±10°C/5sec
- 6.Safety approval:
- 7.RoHS Compliance
- 8.Critical dimension:
- 9.Undimensioned Tolerances:

Dim.L=(1/2P-1)x3.81+16.2		
Dim.B=(1/2P-1)x3.81		
P= number of poles 4-48P		
	Dim B	Dim L
0-30mm	±0.15	±0.20
over 30mm-60mm	±0.20	±0.25
over 60mm-90mm	±0.25	±0.30
over 90mm	±0.30	±0.40

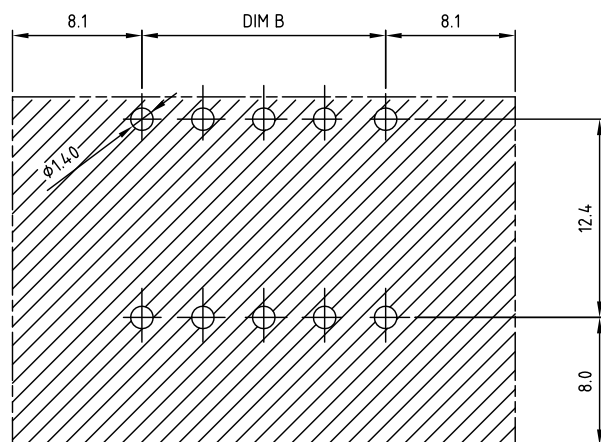

PCB LAYOUT

5	FLANGE NUT	BRASS		4
4	Short PIN	BRASS	TIN PLATED	1/2P
3	Long PIN	BRASS	TIN PLATED	1/2P
2	COVER	PA66 UL94V-0		1
1	BODY	PA66 UL94V-0		1
ITEM	NAME OF PART	MATERIAL	NOTES	Q"TY

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY
X. ± 0.50
X. ± 0.30
CHECKED BY GENIUS
.XX ± 0.10
UNIT / mm
SCALE 1 : 1
.XXX ±
DATE
ANG ± 1°

SIZE A4

PPOJECTION

照片框

ORDER INFORMATION

TBH038B1-PRCF05-xx-LF

SERIES

LEADFREE
02 PER ROW (2+2:04 PIN)
24 PER ROW (24+24:48 PIN)
MALE
DIP 90°
0.5"
FLANGE
CAGE

DESCRIPTION:

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com