

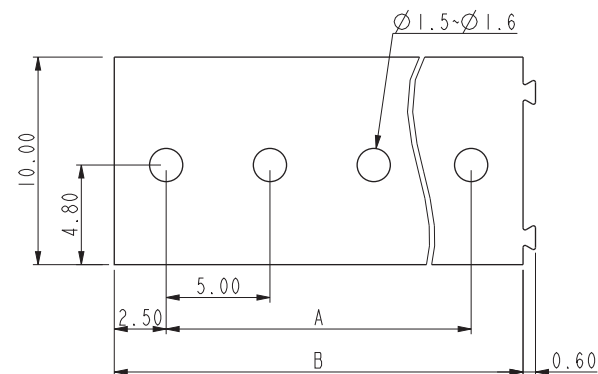
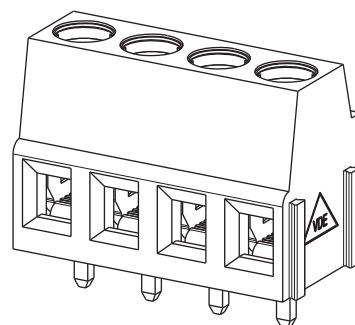
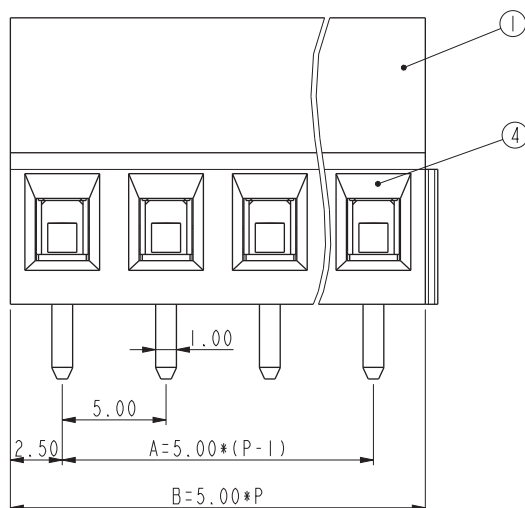


P	2	3	4	5	6	7	8	9	10	11	12	13
A	5.00	10.00	15.00	20.00	25.00	30.00	35.00	40.00	45.00	50.00	55.00	60.00
B	10.00	15.00	20.00	25.00	30.00	35.00	40.00	45.00	50.00	55.00	60.00	65.00
P	14	15	16	17	18	19	20	21	22	23	24	25
A	65.00	70.00	75.00	80.00	85.00	90.00	95.00	100.00	105.00	110.00	115.00	120.00
B	70.00	75.00	80.00	85.00	90.00	95.00	100.00	105.00	110.00	115.00	120.00	125.00
P	26	27	28	29	30	31	32	33	34	35	36	37
A	125.00	130.00	135.00	140.00	145.00	150.00	155.00	160.00	165.00	170.00	175.00	180.00
B	130.00	135.00	140.00	145.00	150.00	155.00	160.00	165.00	170.00	175.00	180.00	185.00
P	38	39	40	41	42	43	44	45	46	47	48	
A	185.00	190.00	195.00	200.00	205.00	210.00	215.00	220.00	225.00	230.00	235.00	
B	190.00	195.00	200.00	205.00	210.00	215.00	220.00	225.00	230.00	235.00	240.00	

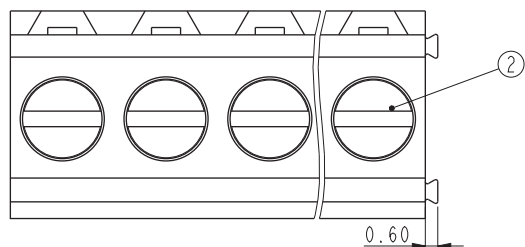

PCB LAYOUT

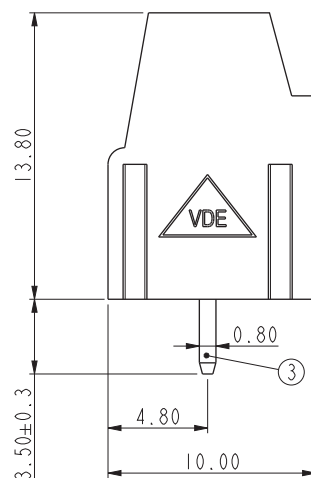

Total Pitch Tolerances	Normal dimension Tolerances
0~30 ±0.20	0~30 ±0.25
over 30~53 ±0.25	over 30~53 ±0.30
over 53~70 ±0.30	over 53~70 ±0.35
over 70~90 ±0.35	over 70~90 ±0.44
over 90~115 ±0.44	over 90~115 ±0.55
over 115~150 ±0.55	over 115~150 ±0.70
over 150~200 ±0.70	over 150~200 ±0.85
over 200~250 ±0.85	over 200~250 ±1.00
over 250~320 ±1.00	over 250~320 ±1.20

4	WIRE CAGE	STEEL	M2.5/ Zn Plated
3	SOLDER PIN	COPPER ALLOY	Tin Plated
2	SCREW	STEEL	M2.5/ Zn Plated
1	HOUSING	PA66	UL94-V0 GREEN
ITEM	NAME OF PART	MATERIAL	NOTES

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

TBH050-D13Sxx-xx-LF

SERIES

DIP180°

HIGH 13.8mm

LEADFREE

02~24WAY

BLANK:GREEN

BK:BLACK

BL:BLUE

SOLE GY:GREY

RD:RED

YL:YELLOW

OR:ORANGE

DESCRIPTION: