

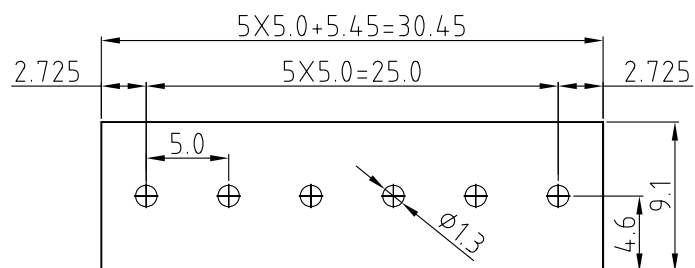


N=Number of contacts

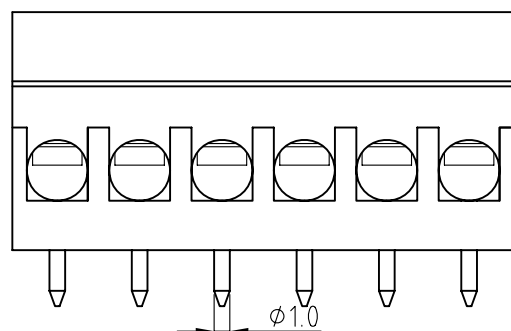

P.C.B. LAYOUT

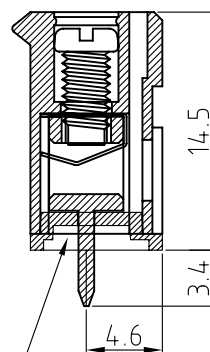

Technical Data:

Material:

Contact(metal housing): Brass (CuZn)

Terminal screw: Steel galvanized with Cr3+ plated

Wire guard: Stainless steel

Insulator body(housing): Polyamide(Glass filled)(UL94V-0)

Electrical

Voltage rating: 250VAC

Current rating: 15 Amps/way max

Contact resistance: 20mΩ(max)

Withstanding Voltage: 2500VAC(1min) Test time=60sec/1pcs

Wire range: 14-24AWG

Mechanical:

Torque: 4.0kgf.cm/M3

Operating temperature: -40°C to +105°C

Soldering reliability:

Test temperature= 250°C±10°C

5 seconds max

Ordering Information:

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

TBH050-D14BK-06-LF

SERIES

LEADFREE

06 WAY

BLACK

HIGH 14.5mm

DIP 180°

DESCRIPTION: