



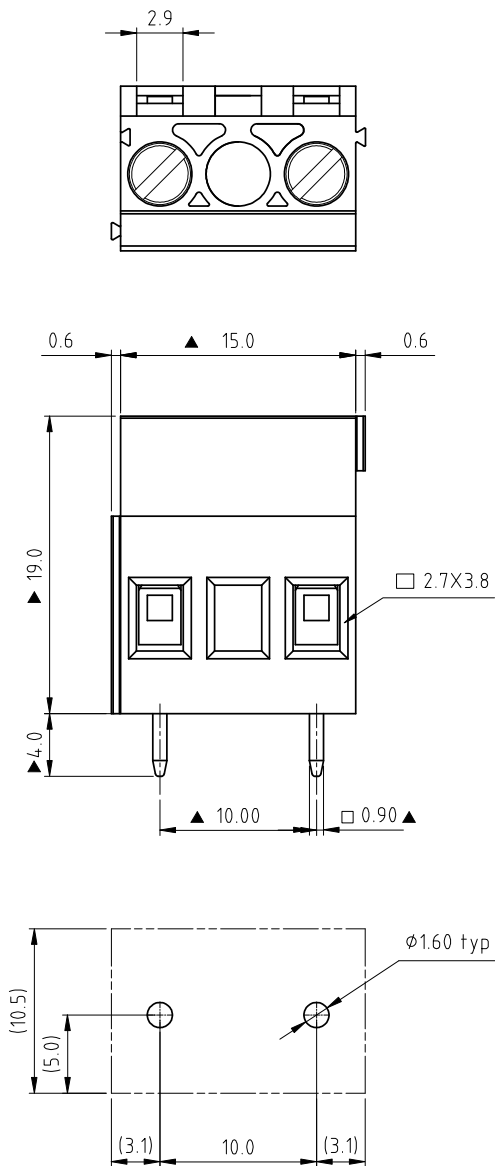

P.C.B. LAYOUT

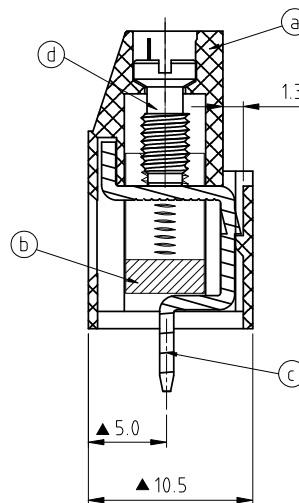

Material:

- Item a Terminal housing: Thermoplastic (UL 94V-0)
- Item b Clamp: Brass Ni plated
- Item c Wire guard solder pin: Brass Tin plated
- Item d Terminal screw: Steel Zinc plating"-slot type

Electrical cULus / VDE

- Voltage rating : 300VAC / 450V
- Current rating : 20A / 24A
- Wire range : 0.2-2.5mm²
- Solid wire(AWG) : 12-30
- Stranded wire(AWG) : 12-30
- Torque : 3.5 Lb-In / 0.5 N.m
- Screw: M3
- Wire strip length: 6-7mm
- Withstanding Voltage: 1.6KV / 2.5KV
- Operating temperature: -40°C to +105°C
- Assembly temperature: -5°C to +100°C
- Soldering temperature: 260°C±5°C/5 Sec
- Safety Approval:
- Critical dimension: ▲

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.50

.X ± 0.30

.XX ± 0.10

.XXX ±

ANG ± 1°

PPOJECTION

照片框

ORDER INFORMATION

TBH050-D19EE-02-LF

SERIES

LEADFREE

02 WAY

EMPTY EVEN

HIGH 19.0mm

DIP180°

DESCRIPTION: 5.0 Series 3P Horizontal (180D wire inlet)-----Without cover,Omit 2P