
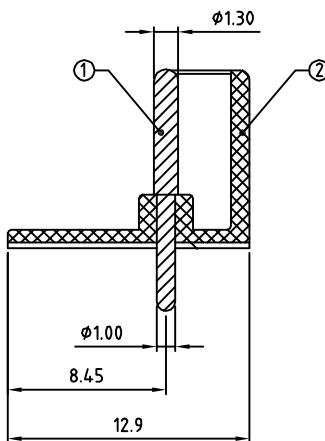
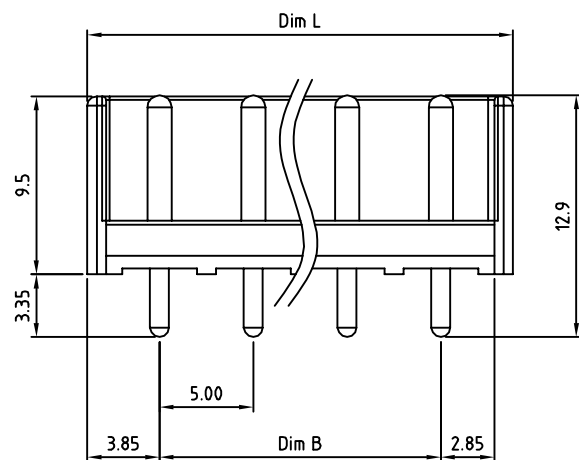
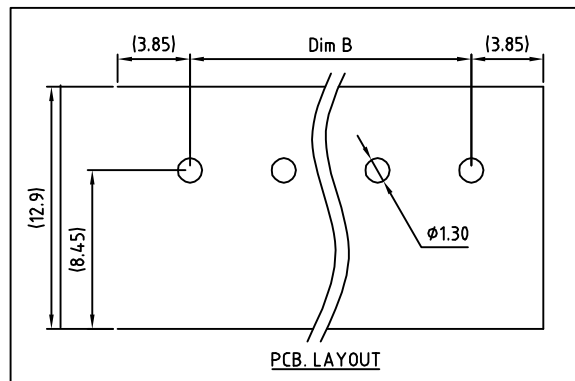


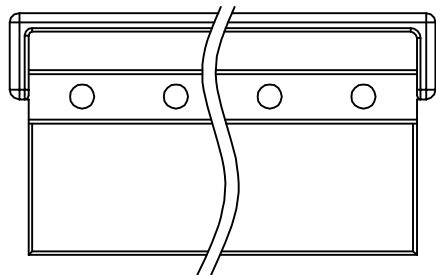

Material

- Item ① Solid PIN: Brass(CuZn), Tin or Au plated.
- Item ② Insulator (housing): PA66 FRIANYL A63V-0

Electrical

- Voltage rating: 300V
- Current rating: 15A
- Withstanding Voltage: 1.6KV
- Operating temperature: -40°C to $+125^{\circ}\text{C}$
- Soldering temperature: $250^{\circ}\text{C} \pm 10^{\circ}\text{C}/5 \text{ Sec}$

Poles	02	03	04	05	06	07	08	09	10	11	12	13
Dim L	12.7	17.7	22.7	27.7	32.7	37.7	42.7	47.7	52.7	57.7	62.7	67.7
Dim B	5.00	10.00	15.00	20.00	25.00	30.00	35.00	40.00	45.00	50.00	55.00	60.00
TOL	± 0.15						± 0.20					± 0.25
Poles	14	15	16	17	18	19	20	21	22	23	24	
Dim L	72.7	77.7	82.7	87.7	92.7	97.7	102.7	107.7	112.7	117.7	122.7	
Dim B	65.00	70.00	75.00	80.00	85.00	90.00	95.00	100.0	105.0	110.0	115.0	
TOL	± 0.25						± 0.30					

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, $\pm$
.X $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$

PPOJECTION

照片框

ORDER INFORMATION

TBH050-PDL-xx-LF

SERIES LEADFREE
02~24WAY
L TYPE
DIP 180°
MALE

DESCRIPTION: