
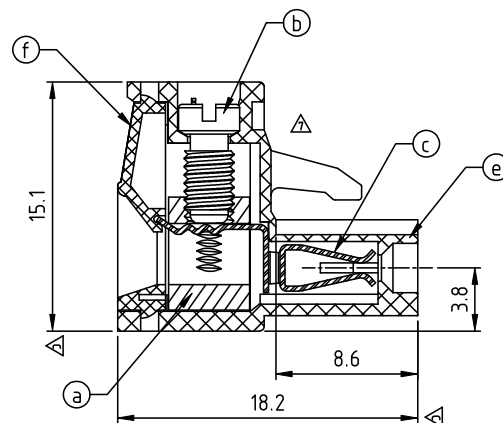
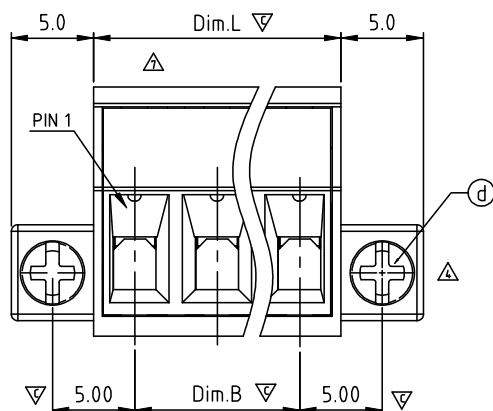


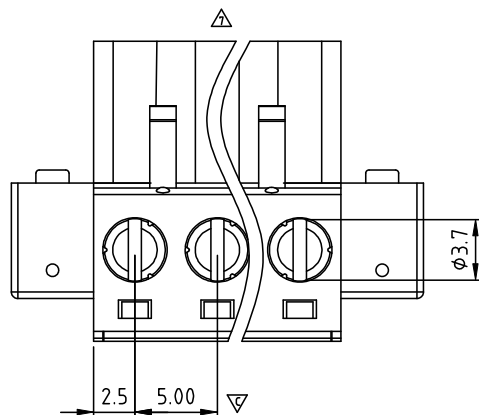

Dim.L = N x 5.0
Dim.B = (N-1) x 5.0
N= number of poles


poles Dim.	2P-6P	7P-12P	13P-18P	19P-24P
Dim.L	±0.10	±0.20	±0.30	±0.40
Dim.B	±0.10	±0.20	±0.25	±0.30

Material

- Item a Clamp: Brass(CuZn) Ni plated
- Item b Terminal screw: Steel Zinc plating "-" slot type
- Item c Female contact: PhBz ,Tin plated
- ▲ Item d With flange screw: Steel Zinc plating M2.5"/- slot type
- Item e Terminal (housing): Thermoplastic (UL94V-0)
- Item f Terminal (cover): Thermoplastic (UL94V-0)

Electrical cULus/VDE/TUV

- Voltage rating: 300VAC/300VAC/300VAC
- Current rating: 20A/20A/20A
- Wire range: 2.5mm²/0.34-2.5mm²
- ▲ Solid wire(AWG): 12-24
- ▲ Stranded wire(AWG): 12-24
- Torque: 5Lb-In/0.5Nm/0.56Nm
- Screw: M3
- Wire strip length: 7-8mm
- Withstanding Voltage: 1.6KV/2.5KV/2.5KV
- ▲ Operating temperature: -40°C to +115°C
- Safety Approval:
- Critical dimension: ▽



RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

TBH050-SWF-xx-LF

SERIES

LEADFREE
02~24WAY
FLANGE
SCREW 90°
FEMALE

DESCRIPTION: