
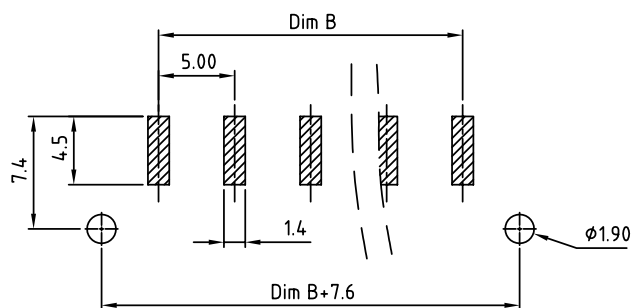
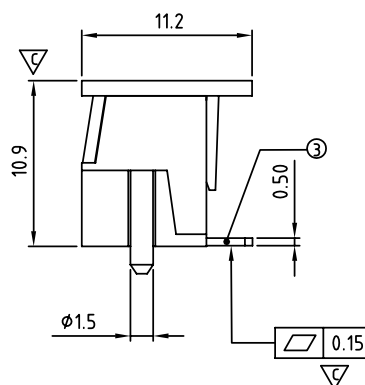
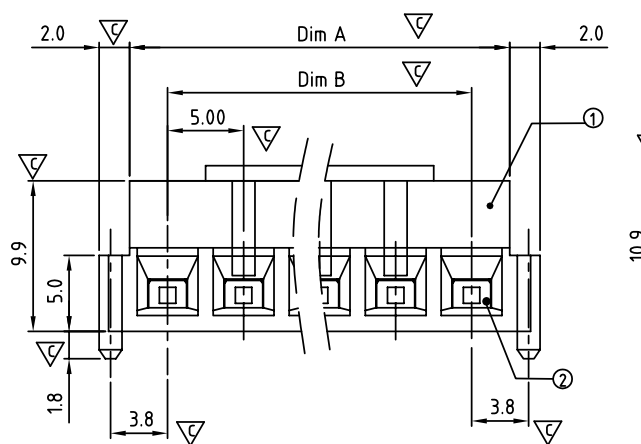


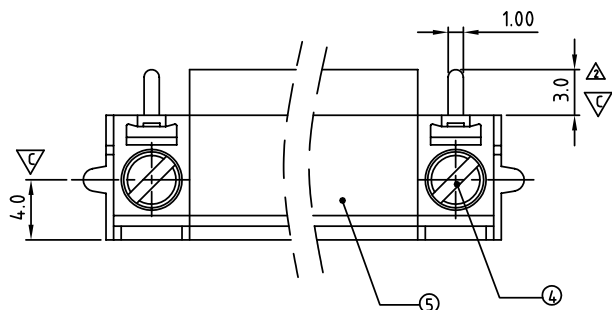

RECOMMENDED PCB LAYOUT

N = NUMBER OF POLES

Dim A=Nx5.0

Dim B=(N-1)x5.0

	Dim A	Dim B
2-4p	±0.15	±0.10
5-7p	±0.20	±0.20

Material

- △ ●①Terminal housing : High temp. polyamide (UL94V-0)
- ②Clamp : Brass , Ni plated
- ③Wire guard solder pin : Brass , Tin plated
- ④Terminal screw: Steel Zinc plating “-” slot type
- △ ●⑤Cover :High temp. polyamide (UL94V-0)

Electrical

- Voltage rating: 300VAC
- Current rating: 6A
- Wire range:
- Solid wire(AWG): 14-30
- Stranded wire(AWG): 14-30
- Torque(Lb-In): 3.5
- Screw: M3
- Wire strip length: 7-8mm
- Withstanding Voltage: 1.6KV
- Operating temperature: -40°C to +130°C
- Soldering temperature: 280°C/10S
- Safety Approval: 

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY

X. ± 0.50

CHECKED BY GENIUS

.X ± 0.30

UNIT / mm

SCALE 1 : 1

.XXX ±

ANG ± 1°

DATE

SIZE A4

PPOJECTION 

照片框

ORDER INFORMATION

TBH050-V10PCR-xx-LF



SERIES
180°SMT
LEADFREE
02-07WAY
REEL
CAP
POST
HIGH 9.9mm

DESCRIPTION:

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

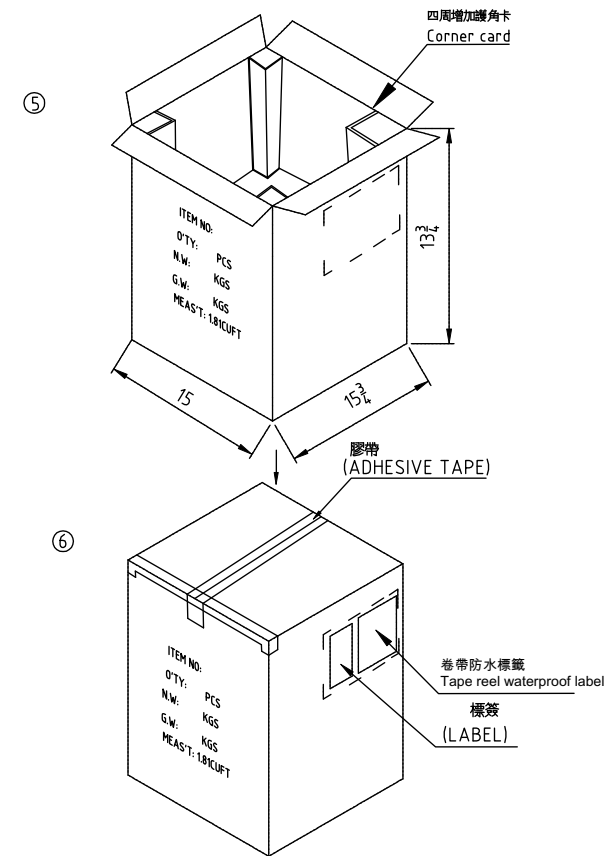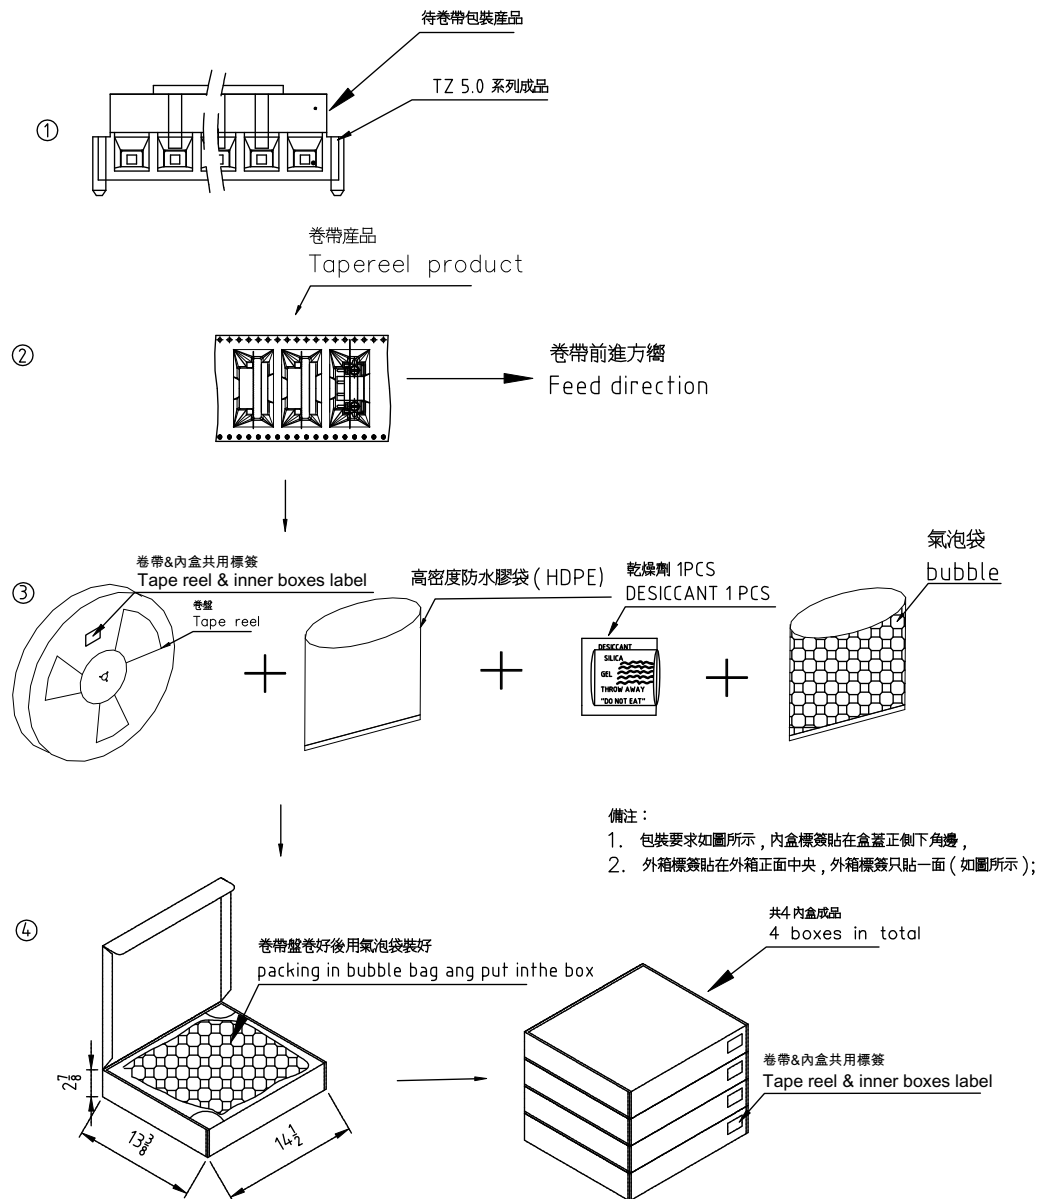

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ± 0.50

.X ± 0.30

.XX ± 0.10

.XXX ±

ANG ± 1°

PPOJECTION

照片框

ORDER INFORMATION

TBH050-V10PCR-xx-LF

SERIES

LEADFREE

02-07WAY

REEL

CAP

POST

HIGH 9.9mm

180°SMT

DESCRIPTION: