


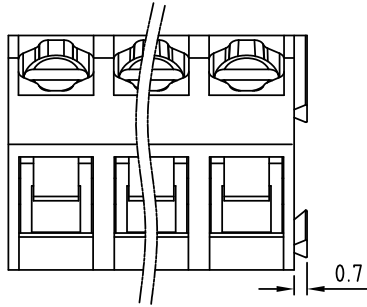


N = Number of poles

Dim A=Nx5.08


Dim B=(N-1)x5.08

	Dim A	Dim B
2-6p	±0.15	±0.15
7-12p	±0.20	±0.20
13-18p	±0.30	±0.30
19-24p	±0.40	±0.40

△

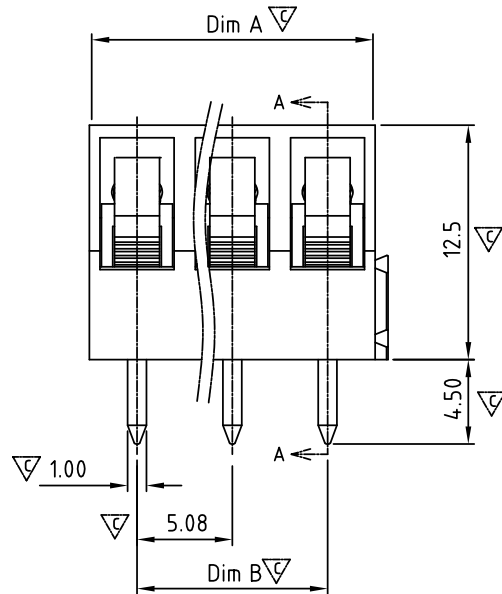

N=Number of contacts

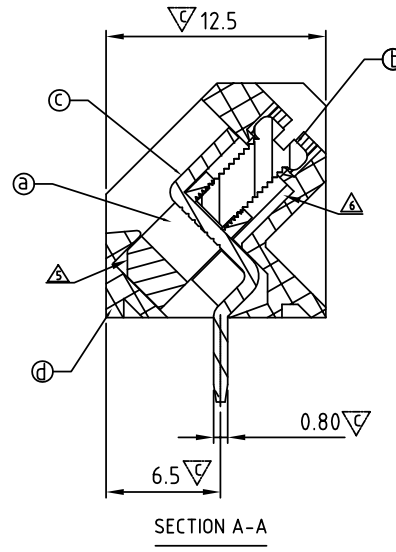


SECTION A-A

Material

- Item① Clamp: Brass,Ni plated
- Item② Terminal screw: Steel Zinc plating "-" slot type.
- Item③ Wire guard solder pin: Brass, Tin plated
- Item④ Terminal housing: Thermoplastic (UL94V-0)

- △ △ Electrical: cULus/VDE
- Voltage rating: 300V/250V
 - Current rating: 15A/10A
 - Wire range: 0.34-4.0mm²
 - Solid wire(AWG): 12-24
 - Stranded wire(AWG): 12-24
 - Torque: 3.5 Lb-In / 0.4 N.m
 - Screw: M2.5
 - Wire strip length: 6-7mm
 - Withstanding Voltage: 1.6 KV/2 KV
 - Operating temperature: -40°C to +115°C
 - Soldering temperature: 250°C±10°C/5 Sec
 - Safety Approval:
 - Critical dimension:

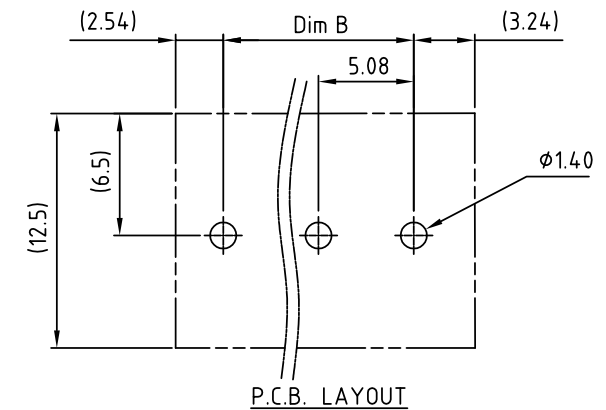

P.C.B. LAYOUT

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

X. ± 0.50

.X ± 0.30

.XX ± 0.10

.XXX ±

ANG ± 1°

PPOJECTION

照片框

ORDER INFORMATION

TBH051-A12-xx-LF

SERIES

LEADFREE

02~24WAY

HIGH 12.0mm

SLANT DIP

DESCRIPTION: