


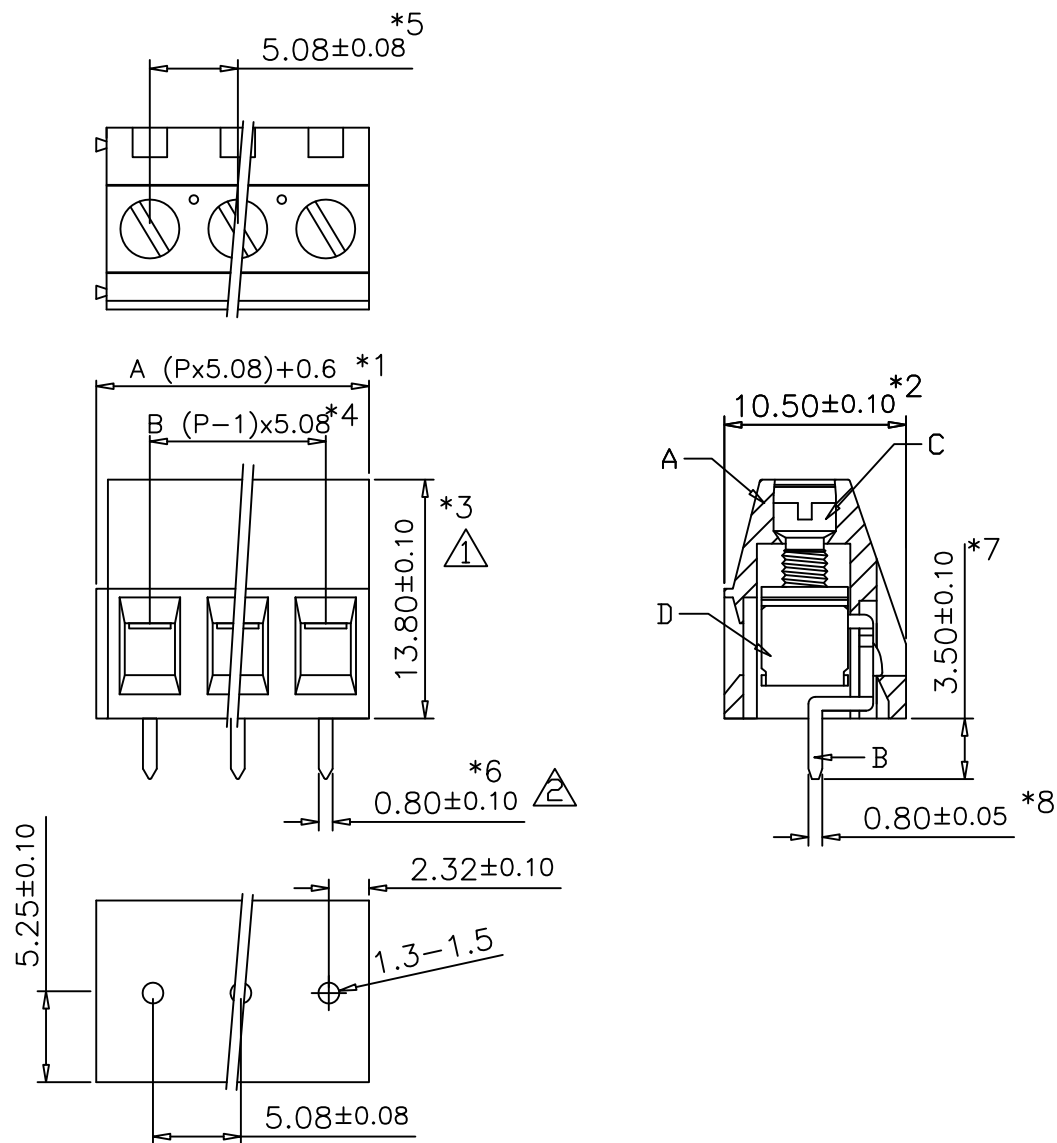

| ✓ | Poles | A $\pm$ 0.30 | B $\pm$ 0.20 |   | 17    | 86.96        | 81.28        |
|---|-------|--------------|--------------|---|-------|--------------|--------------|
|   | 02    | 10.76        | 5.08         |   | 18    | 92.04        | 86.36        |
|   | 03    | 15.84        | 10.16        | ↓ | Poles | A $\pm$ 0.45 | B $\pm$ 0.35 |
|   | 04    | 20.92        | 15.24        |   | 19    | 97.12        | 91.44        |
|   | 05    | 26.00        | 20.32        |   | 20    | 102.20       | 96.52        |
|   | 06    | 31.08        | 25.40        |   | 21    | 107.28       | 101.60       |
| ↓ | Poles | A $\pm$ 0.35 | B $\pm$ 0.25 |   | 22    | 112.36       | 106.68       |
|   | 07    | 36.16        | 30.48        |   | 23    | 117.44       | 111.76       |
|   | 08    | 41.24        | 35.56        |   | 24    | 122.52       | 116.84       |
|   | 09    | 46.32        | 40.64        | ↓ | Poles | A $\pm$ 0.50 | B $\pm$ 0.40 |
|   | 10    | 51.40        | 45.72        |   | 25    | 127.60       | 121.92       |
|   | 11    | 56.48        | 50.80        |   | 26    | 132.68       | 127.00       |
|   | 12    | 61.56        | 55.88        |   |       |              |              |
| ↓ | Poles | A $\pm$ 0.40 | B $\pm$ 0.30 |   |       |              |              |
|   | 13    | 66.64        | 60.96        |   |       |              |              |
|   | 14    | 71.72        | 66.04        |   |       |              |              |
|   | 15    | 76.80        | 71.12        |   |       |              |              |
|   | 16    | 81.88        | 76.20        |   |       |              |              |

Screws Torque: 7.0 In-Lb  
 Wire Range: 16~22 AWG  
 Rated: 10 Amperes.AC250V  
 Operation Temperature:  $-55^{\circ}\text{C} \sim +100^{\circ}\text{C}$   
 Insulation withstands volt: AC2000V min  
 Insulation resistance:  $>1000\text{M}\Omega/\text{DC500V}$

|   | Material        | Plating/Finish | Remark |
|---|-----------------|----------------|--------|
| A | Insulating body | PA66 UL 94V-0  | Green  |
| B | Terminal        | Brass          | Tin    |
| C | Screw           | Steel          | Zinc   |
| D | Clamp           | Brass          | Nickel |

**MORETHANALL**  
 PCB CONNECTORS  
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X,  $\pm$

.X,  $\pm$

.XX,  $\pm$

.XXX,  $\pm$

ANG,  $\pm$

PPOJECTION

照片框

ORDER INFORMATION

TBHO51-D13-xx-LF

SERIES

LEADFREE

02~24WAY

HIGH 13.8mm

DIP 180°

DESCRIPTION: