




NOTES 1:

UL Standard :

- 1.Rating: 300V 20A
PITCH: 5.08mm
- 2.Insulation Withstands Voltage:
AC 2000V at 1 minute
- 3.Using Temperature Range:
-40°C~+115°C
- 4.Screw Torque Value: 0.5N·m
- 5.Suitable Electric Wire: AWG 24~12

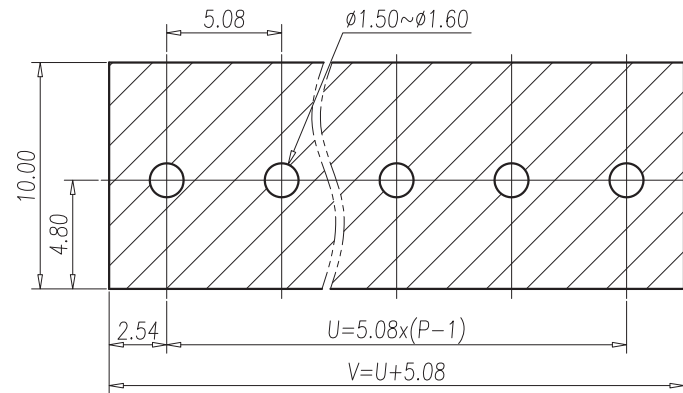

P.C.B. LAYOUT(REF)

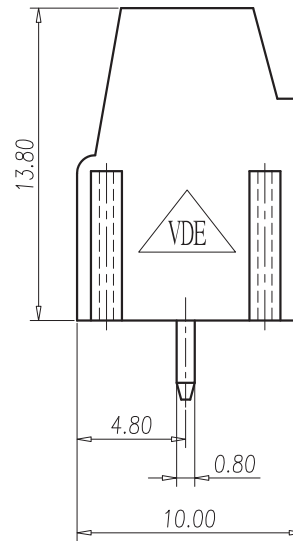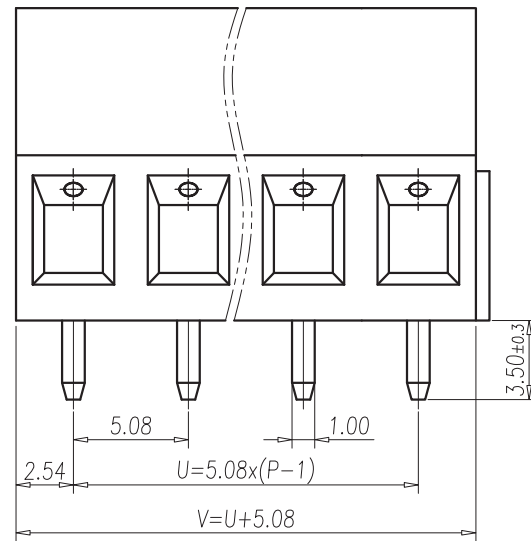

IEC Standard:

- 1.Rating: 250V 24A
- 2.Rate Impulse Voltage: 4000V
- 3.Insulation Resistance:
500MΩ or more at DC500V
- 4.Material Group:I
- 5.Using Temperature Range:
-40°C~+110°C
- 6.Screw Torque Value: 0.4N·m
- 7.Suitable Electric Wire: 0.5~2.5mm²

NOTES 2:

- 1.RoHS compliance
- 2.Pole sizes 02-16 are single piece housing.

4	SCREW	STEEL	M2.5/Zn Plated
3	WIRE CAGE	STEEL	M2.5/Zn Plated
2	SOLDER PIN	COPPER-ALLOY	Tin Plated
1	HOUSING	PA66	UL94-V0 GREEN
ITEM	NAME OF PART	MATERIAL	NOTES

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.30
.XX ± 0.25
.XXX ± 0.20
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

TBH051-D13S1-xx-LF

SERIES

LEADFREE

02~16 WAY

SOLID/ONE

HIGH 13.8mm

DIP 180°

DESCRIPTION: