

SPECIFICATIONS

- ① Housing Material: Polyamide 66(UL94V-0), Green
- ② Screw: M2.6 Zinc Plated Steel
- ③ Terminals: Tin Plated Brass
- ④ Wire Clamp: Nickel Plated Brass

Screws Torque: 3.5 In-Lb

Wire Range: 16~22 AWG

Rated: 10 Amperes.AC250V

Operation Temperature: -55°C~+100°C

Insulation withstands volt: AC2000V min


Insulation resistance: >1000MΩ or more at DC500V

Pole Size 2~26P

Tolerance ± 0.5

POLE	2	3	4	5	6	7	8	9	10	11	12	13	14	15
A	10.7.6	15.84	20.92	26	31.08	36.16	41.24	46.32	51.4	56.48	61.56	66.64	71.72	76.8
B	5.08	10.16	15.24	20.32	25.4	30.48	35.56	40.64	45.72	50.8	55.88	60.96	66.04	71.12
POLE	16	17	18	19	20	21	22	23	24	25	26			
A	81.88	86.96	92.04	97.12	102.2	107.28	112.36	117.44	122.52	127.6	132.68			
B	76.2	81.28	86.36	91.44	96.52	101.6	106.68	111.76	116.84	121.92	127			

PCB LAYOUT

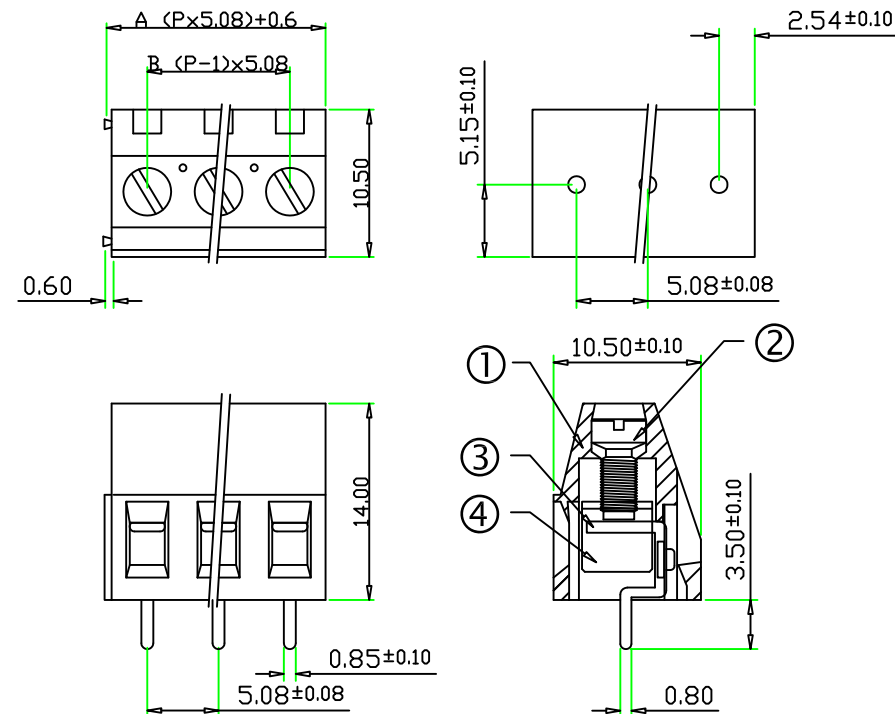

照片框

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

X, ±

CHECKED BY GENIUS

.X ±

UNIT / mm

SCALE 1 : 1

.XX ±

DATE

.XXX ±

ANG ±

SIZE A4

PPOJECTION

ORDER INFORMATION

TBH051-D14-xx-LF

SERIES

LEADFREE

02~24WAY

HIGH 14.0mm

DIP 180°

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: Barrier type terminal block