
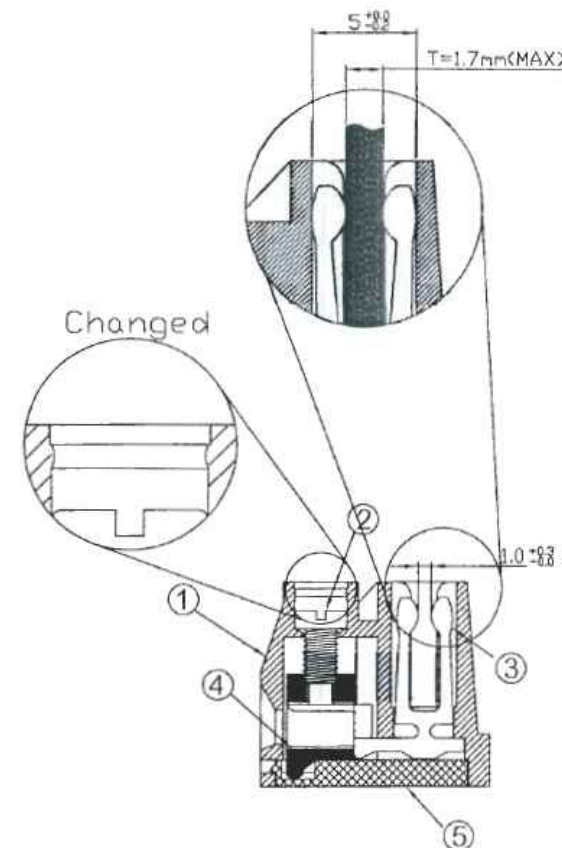


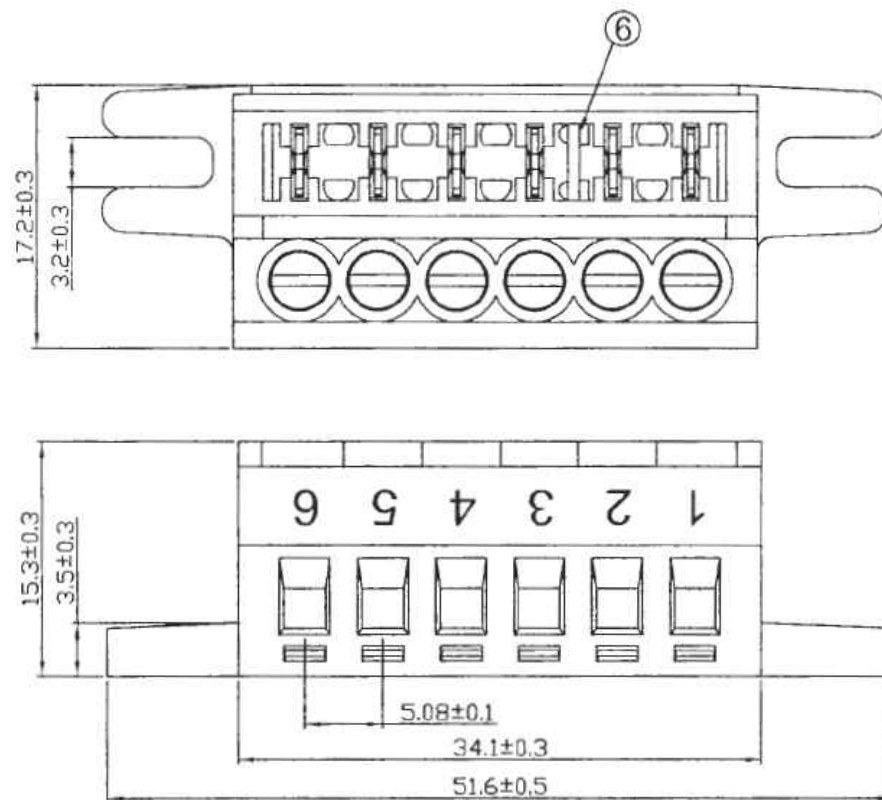

CONFIRMED & ACCEPTED BY				
	Material		Plating/Finish	Remark
1	Insulating body	PC		Gray
2	Screw	Steel M2.5	Zinc+Cr ³	
3	Terminal	Brass	Tin plated	
4	Cage clamp	Brass	Ni plated	
5	Bottom cover	PC		Gray
6	Polarization key	PC		Yellow

Current rating : 10Amp AC250V
 Insulation withstands volt : AC2500V min
 Insulation resistance : >2000MΩ DC500V
 Operation temperature : -40°C + 120°C
 Wire strip length : 4mm~5mm
 Wire range : 14~24 AWG
 Screws torque : 4.5 lb-inch

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ± 0.50

.X ± 0.30

.XX ± 0.10

.XXX ±

ANG ± 1°

PPOJECTION

照片框

ORDER INFORMATION

TBH051-EUPE-06K2-LF

SERIES

UP

EDGE

PANEL

06 WAY

LEADFREE

KEY WAY 2/3

DESCRIPTION: