

Technical Data:

Material:



- Solder Pin: Brass with Tin plated
- Insulator body(housing): Polyamide(Glass filled)(UL94V-0)

Electrical

- Voltage rating: 300VAC
- Current rating: 10A
- Insulation resistance: 500M Ω at DC 500V
- Withstanding Voltage: AC 1500V(1min)



Mechanical:

- Using temperature Range: -40°C to +105°C
- Soldering temperature: +250°, 5seconds Max.

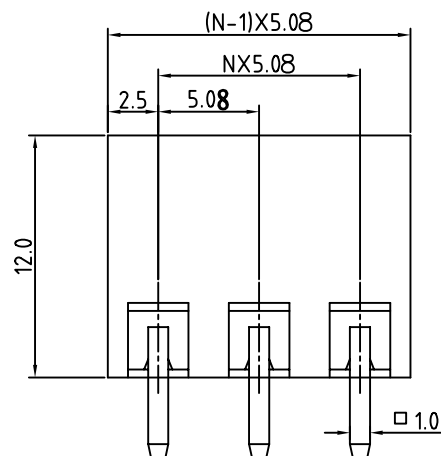

N=Number of contacts

PCB. LAYOUT

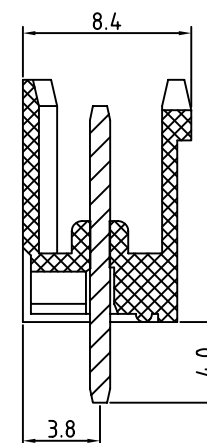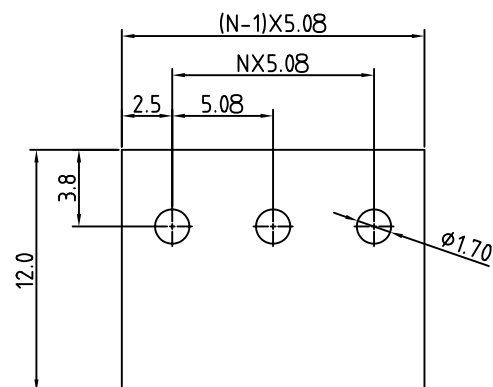

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, $\pm$
.X $\pm$ 0.50
.XX $\pm$ 0.30
.XXX $\pm$ 0.10
ANG $\pm$

照片框

ORDER INFORMATION

TBH051-PDBL-xx-LF

SERIES

LEADFREE
02~24WAY
BLUE
DIP 180°
MALE

DESCRIPTION: 5.08mm 180° OPEN TYPE