

Technical data

1.Nominal voltage: 300V/15A (IEC 320V/12A)
PITCH:5.08mm

2.Insulation Withstands Voltage:
AC 1600V/MIN / AC 2500V/MIN

3.Insulation Resistance:
1000M Ω or more at DC500V

4.Using temperature range:-40°C ~115°C

5.Soldering temperature range:250°C $\pm$ 10°C/5sec

6.Safety approval:  


7.RoHS Compliance

8.Critical dimension: 

9.Undimensioned Tolerances:

Dim.L=P $\times$ 5.08 $\pm$ 2.0		
Dim.B=(P-1) $\times$ 5.08		
P= number of poles 2-24P		
	Dim B	Dim L
0-30mm	$\pm$ 0.15	$\pm$ 0.20
over 30mm-60mm	$\pm$ 0.20	$\pm$ 0.25
over 60mm-90mm	$\pm$ 0.25	$\pm$ 0.30
over 90mm	$\pm$ 0.30	$\pm$ 0.40

2	PIN	BRASS	TIN PLATED	P
1	BODY	PA66 UL94V-0		1
ITEM	NAME OF PART	MATERIAL	NOTES	Q"TY

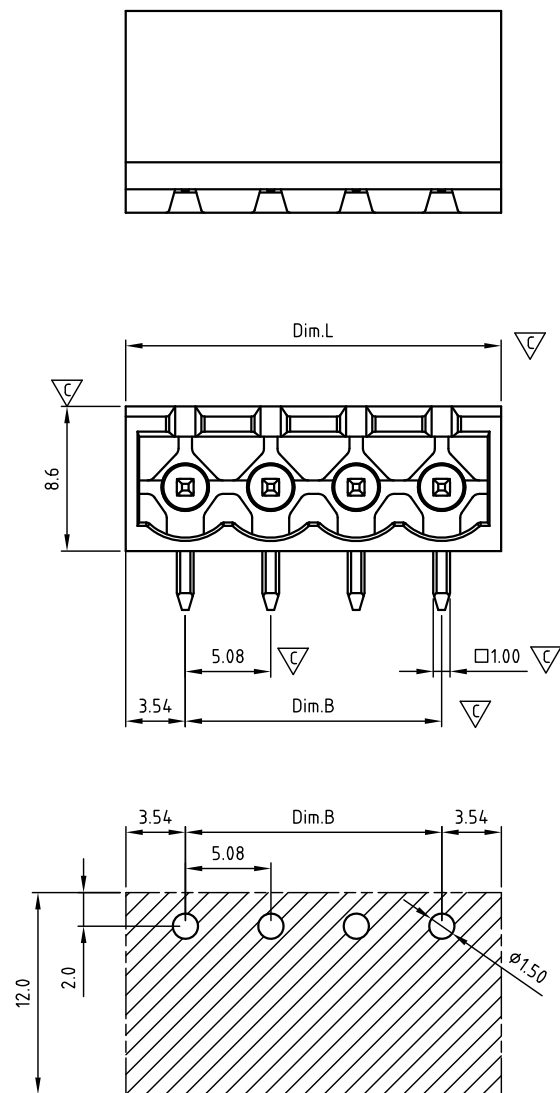

PCB LAYOUT

照片框

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY

X. $\pm$ 0.50

CHECKED BY GENIUS

.X $\pm$ 0.30

UNIT / mm

SCALE 1 : 1

.XX $\pm$ 0.10

DATE

.XXX $\pm$

ANG $\pm$ 1°

SIZE A4

PPOJECTION 

ORDER INFORMATION

TBH051-PRB-xx-LF

SERIES

LEADFREE

02~24WAY

BOX

DIP 90°

MALE

DESCRIPTION:

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com