
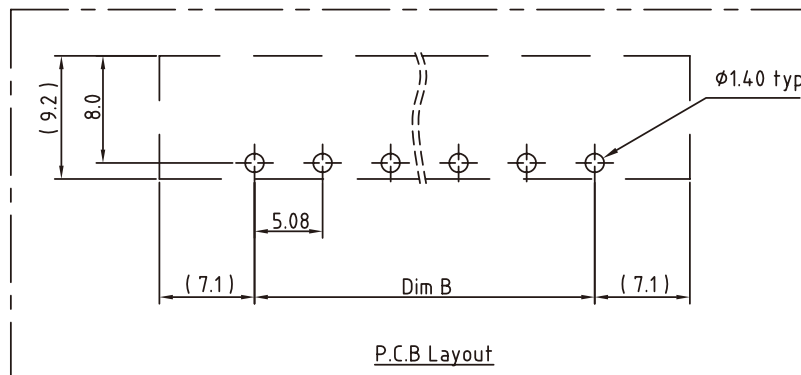


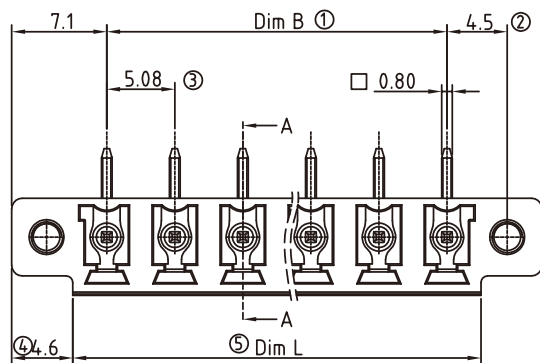


Material:


- Item ③ Male contact pin: Copper Tin plated
- Item ⑤ Terminal(housing): Thermoplastic (UL94V-0)
- Item ⑥ With flange nut: Brass ,M2.5

Electrical:

- Voltage rating: 300V
- Current rating: 10A
- Withstanding Voltage: 1.6 KV
- Operating temperature: -40°C to +115°C
- Soldering temperature: 250°C±10°C/5 Sec
- Safety Approval:  us



SECTION A-A



Poles	02	03	04	05	06	07	08	09	10	11	12	13
Dim L	10.16	15.24	20.32	25.4	30.48	35.56	40.64	45.72	50.8	55.88	60.96	66.04
Dim B	5.08	10.16	15.24	20.32	25.4	30.48	35.56	40.64	45.72	50.8	55.88	60.96
TOL	±0.15			±0.25						±0.30		
Poles	14	15	16	17	18	19	20	21	22	23	24	
Dim L	71.12	76.2	81.28	86.36	91.44	96.52	101.6	106.68	111.76	116.84	121.92	
Dim B	66.04	71.12	76.2	81.28	86.36	91.44	96.52	101.6	106.68	111.76	116.84	
TOL	+0.30		±0.40									

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION 

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

TBH051-PRCF-xx-LF

SERIES

LEADFREE

02~24WAY

FLANGE

CAGE

DIP 90°

MALE

DESCRIPTION: