
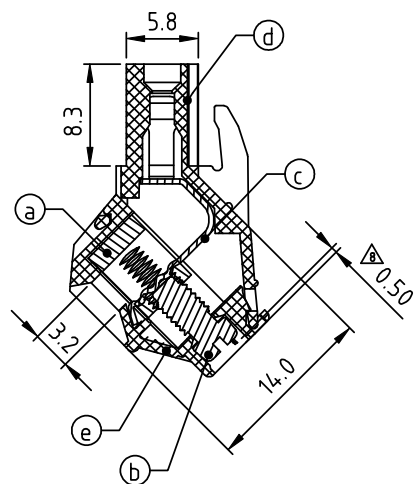
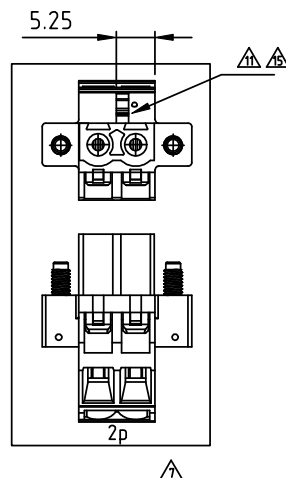


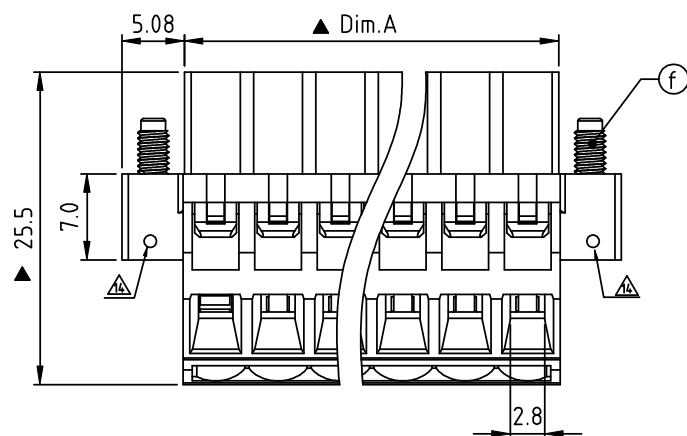

- Item ② Clamp: Brass (CuZn) Ni plated
 - Item ③ Terminal screw: Steel Zinc plating “-” slot type
 - Item ④ Female contact: PhBz ,Tin plated
 - Item ⑤ Terminal (up body): Thermoplastic (UL94V-0)
 - Item ⑥ Terminal (down body): Thermoplastic (UL94V-0)
 - Item ⑦ Flange screw: Steel Zinc plating “+/-” slot type
- Electrical cULus
- Voltage rating: 300VAC
 - △ ● Current rating: 20A
 - Wire range:
 - △ ● Solid wire(AWG): 12-22
 - △ ● Stranded wire(AWG): 12-22
 - △ ● Torque: 4 Lb-In
 - Screw: M3
 - Wire strip length: 7-8mm
 - Withstanding Voltage: 1.6KV
 - △ ● Operating temperature: -40°C to +115°C
 - Safety Approval:  86
 - Critical dimension:  

POLES	TOL Dim.A/E
2p-6p	± 0.10
7p-12p	± 0.20
13p-18p	± 0.30
19p-24p	± 0.40

照片框

DESCRIPTION: