

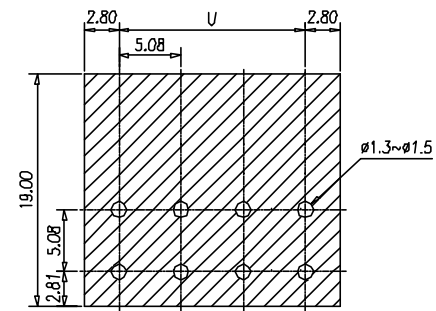
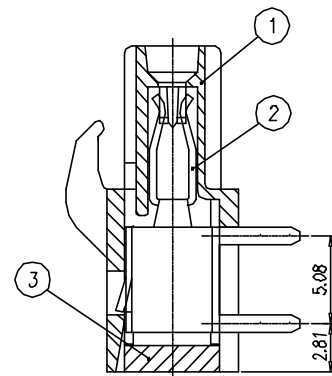

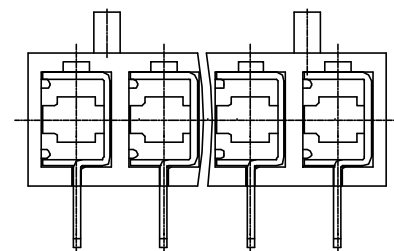
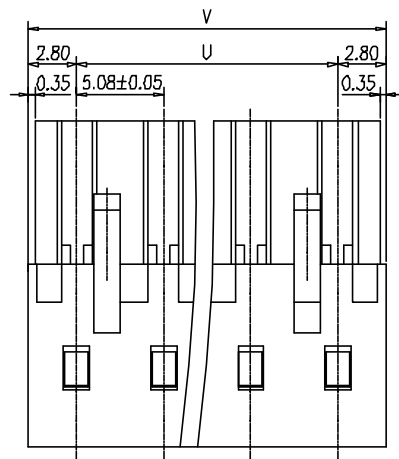


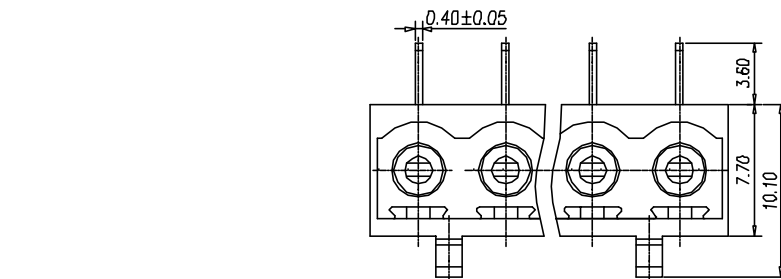

P.C.B. LAYOUT

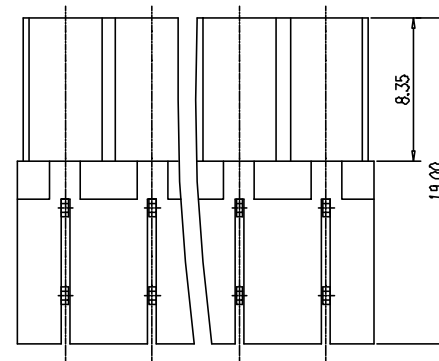

- NOTES: 1. Rating: 300V 15A
PITCH: 5.08mm
2. Insulation Withstands Voltage:
AC 2000V/MIN
3. Insulation Resistance:
500M Ω or more at DC500V
4. Using Temperature Range:
-40°C~+105°C

5. Suitable Electric Wire: AWC 22~14
6. Undimensioned Tolerances:

$\pm$	$\frac{1}{2}$	$\frac{1}{4}$	0.05/10
$\pm$	$\frac{1}{4}$	$\frac{1}{4}$	0.2/10
PITCH ERROR			0.05/10
UNDIMENSIONED TOLERANCES			± 0.3

3	COVER	0121L5XX00	P	PA66	GREEN
2	CLAMP	0121B00500	P	MSP1-H BRONZE	Tin Plated
1	HOUSING	0121V6XX00	1	PA66	GREEN
ITEM	NAME OF PART	NO. OF PART	Q*TY	MATERIAL	NOTES

P	2	3	4	5	6	7	8	9	10	11	12	13
U	5.08	10.16	15.24	20.32	25.40	30.48	35.56	40.64	45.72	50.80	55.88	60.96
V	10.68	15.76	20.84	25.92	31.00	36.08	41.16	46.24	51.32	56.40	61.48	66.56
P	14	15	16	17	18	19	20	21	22	23	24	
U	66.04	71.12	76.20	81.28	86.36	91.44	96.52	101.60	106.68	111.76	116.84	
V	71.64	76.72	81.80	86.88	91.96	97.04	102.12	107.20	112.28	117.36	122.44	

Tolerances for PITCH ERROR

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, $\pm$
X, $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$

照片框

ORDER INFORMATION

TBHO51-SR19-xx-LF

SERIES

LEADFREE
02~24WAY
HIGH 19.0mm
DIP 90°
FEMALE

DESCRIPTION: