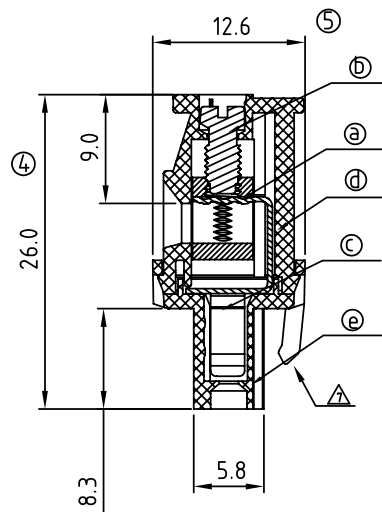
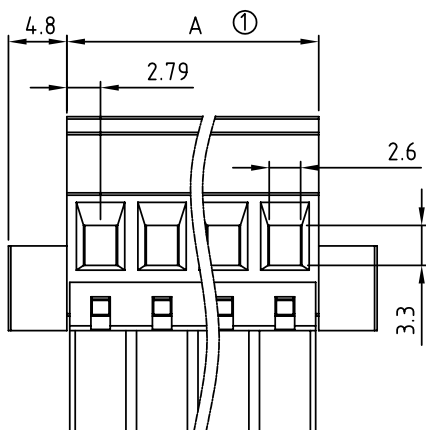

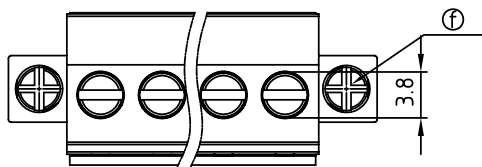


Material

- Item ① Clamp: Brass(CuZn), Ni plating
- Item ② Terminal screw: Steel Cr3+ Zinc plating "-" slot type
- Item ③ Female contact: PhBz, Tin plated
- Item ④ Terminals up body: Thermoplastic (UL94V-0)
- Item ⑤ Terminals down body: Thermoplastic (UL94V-0)
- Item ⑥ With flange screw: Steel Zinc plating M2.5 "+" slot type
- △ △ Electrical cULus/VDE/TUV

- Voltage rating: 300VAC/300VAC/300VAC
- Current rating: 15A/17A/15A
- Wire range: 2.5mm /0.34-2.5mm²
- Solid wire(AWG): 12-24
- Stranded wire(AWG): 12-24
- Torque: 3.5Lb-In./0.5Nm/0.4Nm
- Screw: M3
- Wire strip length: 6-7mm
- Withstanding Voltage: 1.6KV/2.5KV/2.5KV
- △ ● Operating temperature: -40°C to +115°C
- Safety approval:   

Dim A=N×5.08+0.50 △
Dim B=(N-1)×5.08
N=Number of contacts

	Dim A	Dim B
2-6p	±0.15	±0.10
7-12p	±0.25	±0.15
13-18p	±0.30	±0.20
19-24p	±0.40	±0.30

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION 

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

TBH051-SVBF-xx-LF

SERIES
LEADFREE
02-24WAY
FLANGE
BOTTOM KEY
SCREW 180°
FEMALE

DESCRIPTION: