


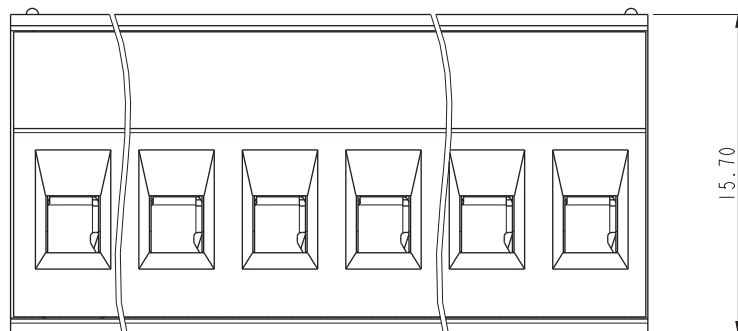


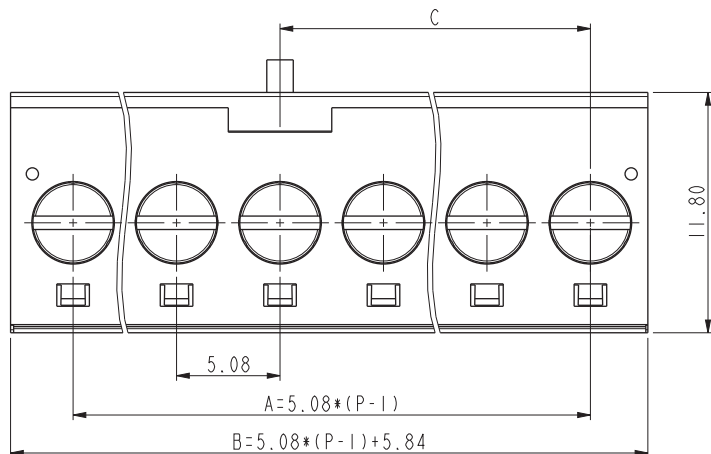

P	2	3	4	5	6	7	8	9	10	11	12	13
A	5.08	10.16	15.24	20.32	25.40	30.48	35.56	40.64	45.72	50.80	55.88	60.96
B	10.92	16.00	21.08	26.16	31.24	36.32	41.40	46.48	51.56	56.64	61.72	66.80
C	5.08	5.08	10.16	10.16	15.24	15.24	20.32	20.32	25.40	25.40	30.48	30.48
P	14	15	16	17	18	19	20	21	22	23	24	
A	66.04	71.12	76.20	81.28	86.36	91.44	96.52	101.60	106.68	111.76	116.84	
B	71.88	76.96	82.04	87.12	92.20	97.28	102.36	107.44	112.52	117.60	122.68	
C	35.56	35.56	40.64	40.64	45.72	45.72	50.80	50.80	55.88	55.88	60.96	

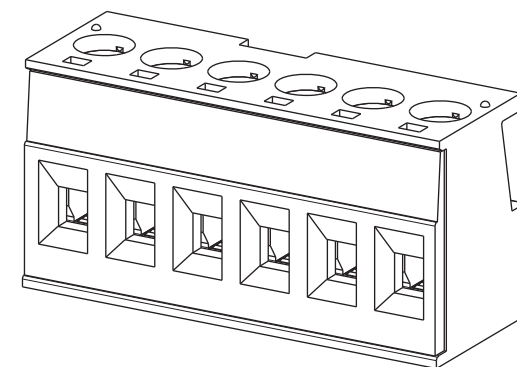

Total Pitch Tolerances		Normal dimension Tolerances	
0~30	±0.20	0~30	±0.25
over 30~53	±0.25	over 30~53	±0.30
over 53~70	±0.30	over 53~70	±0.35
over 70~90	±0.35	over 70~90	±0.44
over 90~115	±0.44	over 90~115	±0.55
over 115~150	±0.55	over 115~150	±0.70
over 150~200	±0.70	over 150~200	±0.85
over 200~250	±0.85	over 200~250	±1.00
over 250~320	±1.00	over 250~320	±1.20

5	WIRE CAGE	STEEL	M2.5 / Zn Plated
4	SCREW	Steel	M2.5/ Zn Plated
3	Plug Housing	PA66	UL94-V0 BLACK
2	Plug Cover	PA66	UL94-V0 BLACK
1	Clamp	Copper Alloy	Tin Plated
ITEM	NAME OF PART	MATERIAL	NOTES

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

TBH051-SW15-xx-LF

SERIES

LEADFREE
02~24WAY
HIGH 15.7mm
SCREW WIRE
FEMALE

DESCRIPTION: