

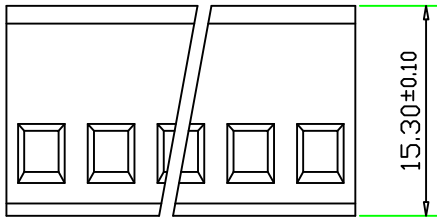


SPECIFICATIONS

- ① Housing Material: Polyamide 66(UL94V-0), Green
- ② Screw: M2.6 Nickel Plated Steel
- ③ Wire Clamp: Nickel Plated Brass
- ④ Contact: Nickel Plated Phosphorus Bronze

Screws Torque: 7 In-Lb  
Wier Range: 12~16 AWG  
Rated: 12 Amperes.AC250V  
Operation Temperature: -55°C~+115°C  
Insulation withstands volt: AC2000V min  
Insulation resistance: >1000MΩ or more at DC500V

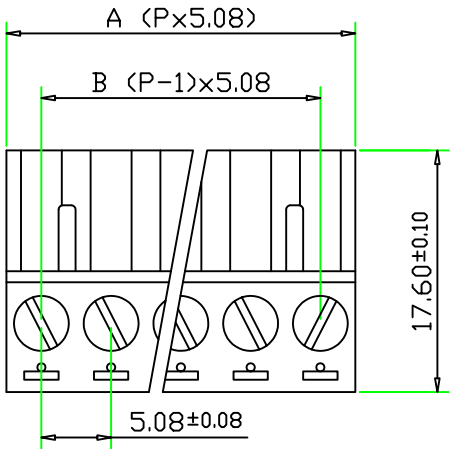

Tolerance ± 0.50

| POLE | 2     | 3     | 4     | 5     | 6     | 7     | 8     | 9     | 10    | 11    | 12    |
|------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| A    | 10.16 | 15.24 | 20.32 | 25.4  | 30.48 | 35.56 | 40.64 | 45.72 | 50.8  | 55.88 | 60.96 |
| B    | 5.08  | 10.16 | 15.24 | 20.32 | 25.4  | 30.48 | 35.56 | 40.64 | 45.72 | 50.8  | 55.88 |

| POLE | 13    | 14    | 15    | 16    | 17    | 18    | 19    | 20    | 21     | 22     | 23     | 24     |
|------|-------|-------|-------|-------|-------|-------|-------|-------|--------|--------|--------|--------|
| A    | 66.04 | 71.12 | 76.2  | 81.28 | 86.36 | 91.44 | 96.52 | 101.6 | 106.68 | 111.76 | 116.84 | 121.92 |
| B    | 60.96 | 66.04 | 71.12 | 76.2  | 81.28 | 86.36 | 91.44 | 96.52 | 101.6  | 106.68 | 111.76 | 116.84 |

RoHS Compliant

TOLERANCES ARE



煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±  
.X ±  
.XX ±  
.XXX ±  
ANG ±

照片框

ORDER INFORMATION

TBH051-SWXS-xx-LF

SERIES

LEADFREE  
02~24WAY  
WITHOUT/ SOUND  
SCREW WIRE  
FEMALE

DESCRIPTION: