



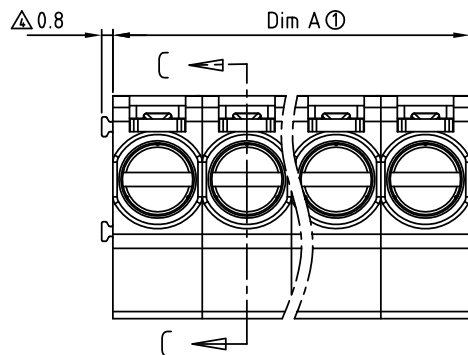


N = Number of poles

Dim A = N x 6.35

Dim B = (N - 1) x 6.35

Poles	Dim A	Dim B
1-6p	±0.20	±0.15
7-12p	±0.30	±0.25
13-16p	±0.40	±0.35

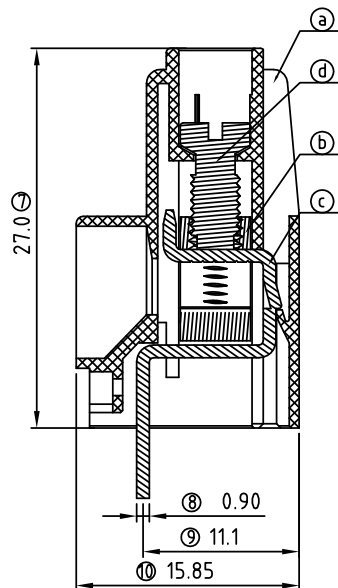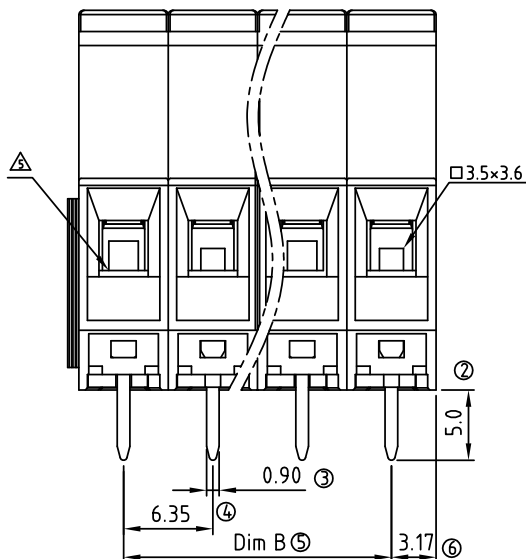


SECTION C-C

Material:

- Item a Terminal housing: Thermoplastic (UL 94V-0)
- Item b Clamp: Brass Ni plated
- Item c Wire guard solder pin (Front single row): Copper Tin plated
- Item d Terminal screw: Steel Zinc plating "slot type"

Electrical

- Voltage rating: 300VAC
- Current rating: 30A
- Wire range:
- Solid wire (AWG): 10-24
- Stranded wire (AWG): 10-24
- Torque (Lb-In): 5.2
- Screw: M3.5
- Wire strip length: 8-9mm
- Withstanding Voltage: 1.6KV
- Operating temperature: -40°C to +115°C
- Soldering temperature: 250°C ± 10°C / 5 Sec
- Safety Approval:  us

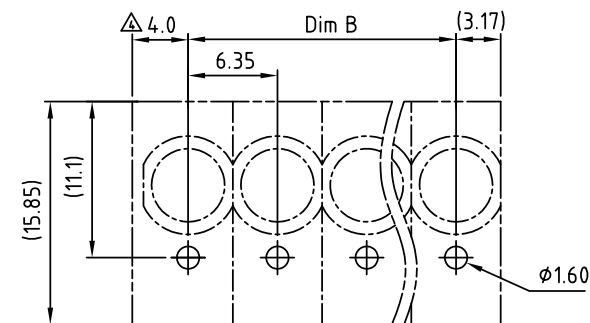

PCB LAYOUT

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION 

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

TBH063-D27-xxL-LF

SERIES

LEADFREE

L TYPE FOOT

01~16WAY

HIGH 27mm

DIP 180°

DESCRIPTION: