

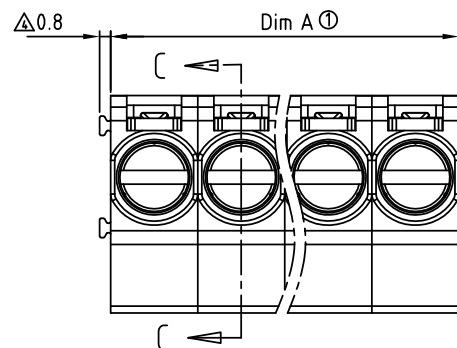


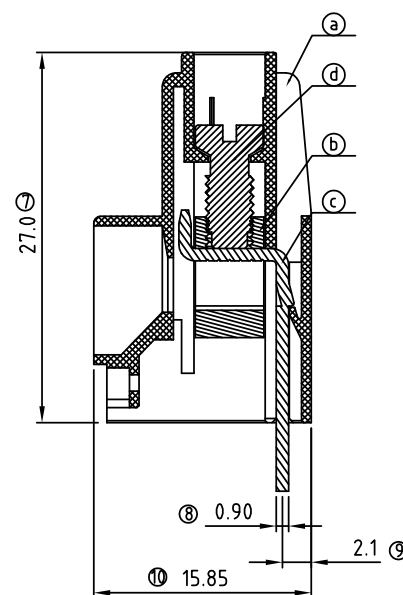

N = Number of poles
 Dim A=Nx6.35
 Dim B=(N-1)x6.35

Poles	Dim A	Dim B
1-6p	±0.20	±0.15
7-12p	±0.30	±0.25
13-16p	±0.40	±0.35

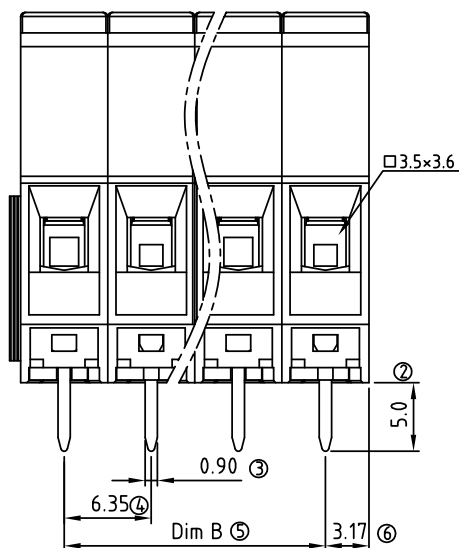


SECTION C-C

Material:

- Item a Terminal housing: Thermoplastic (UL 94V-0)
- Item b Clamp: Brass, Ni plated
- △ Item c Wire guard solder pin (Back single row): Copper Tin plated
- Item d Terminal screw: Steel, Zinc plating"- "slot type

Electrical

- Voltage rating: 300VAC
- Current rating: 30A
- Wire range:
- Solid wire(AWG): 10-24
- Stranded wire(AWG): 10-24
- △ Torque(Lb-In): 5.2
- Screw: M3.5
- Wire strip length: 8-9mm
- Withstanding Voltage: 1.6KV
- Operating temperature: -40°C to +115°C
- Soldering temperature: 250°C±10°C/5 Sec
- Safety Approval:  us

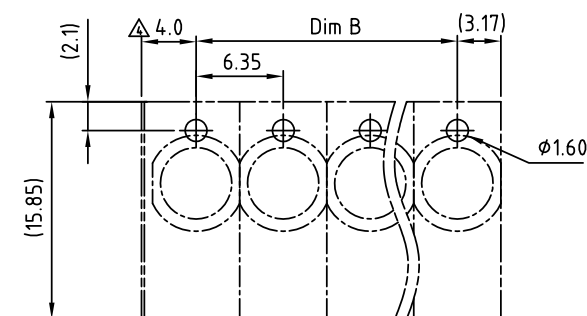

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION 

X, ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±

照片框

ORDER INFORMATION

TBH063-D27-xxR-LF

SERIES

LEADFREE

R TYPE FOOT

01~16WAY

HIGH 27mm

DIP 180°

DESCRIPTION: