


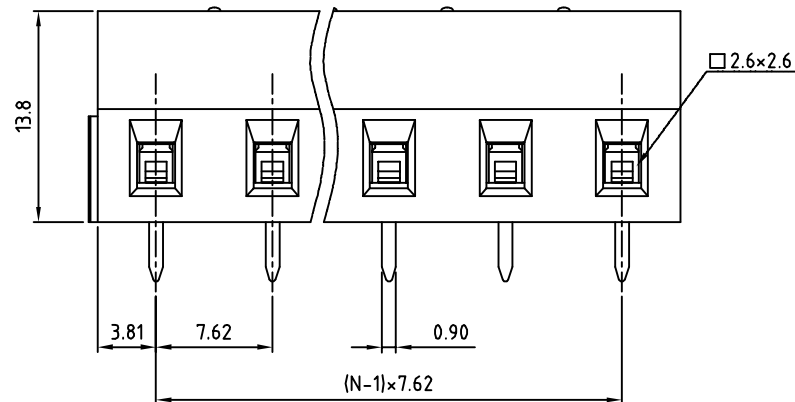


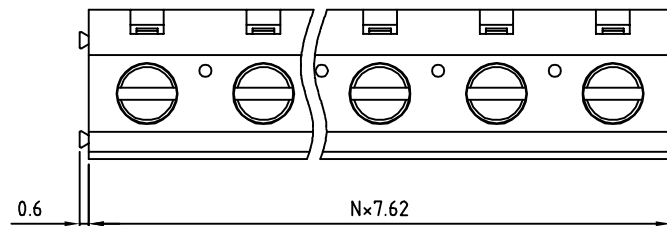

N=Number of contacts

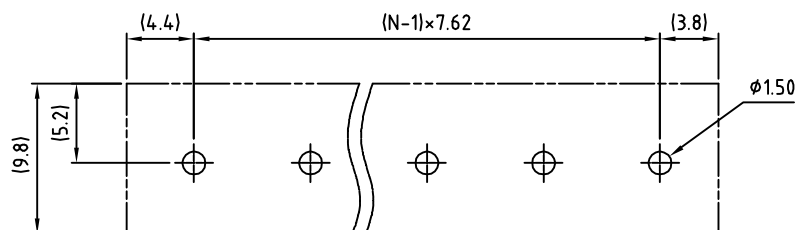

P.C.B. LAYOUT

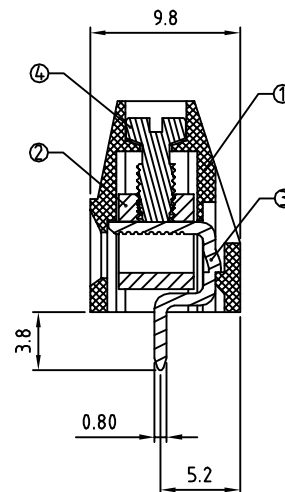

Material:

- Item 1 Insulator body: Thermoplastic (UL 94V-0)
- Item 2 Terminal body(house): Brass ,Ni plated
- Item 3 Contacts: Brass ,Tin plated
- Item 4 Terminal screw: Steel Zinc plating"- "slot type

Electrical UL

- Voltage rating: 300VAC
- Current rating: 10A
- Wire range:
- Solid wire(AWG): 12-22
- Stranded wire(AWG): 12-22
- Torque(Lb-In): 3.5
- Screw: M2.5
- Wire strip length: 6-7mm
- Withstanding Voltage: 1.6KV
- Operating temperature: -30°C to +105°C
- Soldering temperature: 250°C±10°C/5 Sec
- Safety Approval:

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

TBHO76-D13-xx-LF

SERIES

LEADFREE

02-24 WAY

HIGH 13.8mm

DIP 180°

DESCRIPTION: