

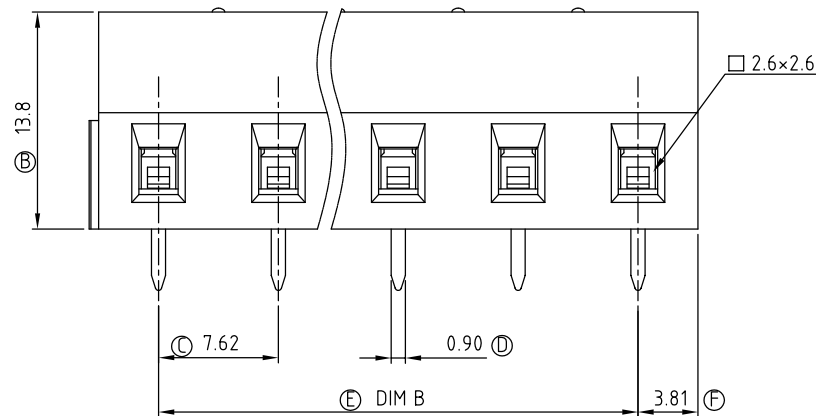


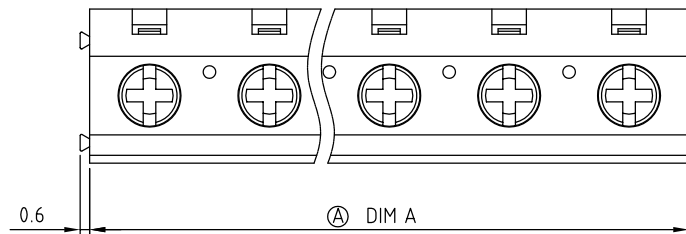

N=Number of contacts

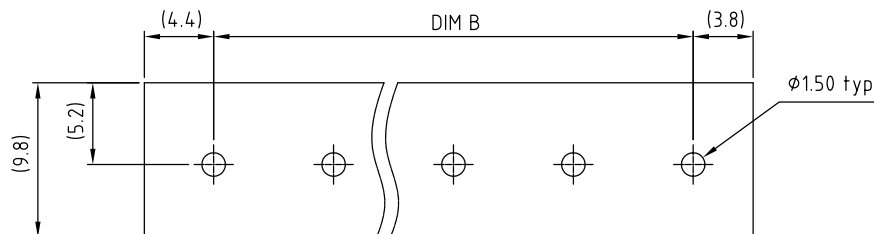


P.C.B LAYOUT

N = Number of poles

|       |                     |
|-------|---------------------|
| DIM A | $N \times 7.62$     |
| DIM B | $(N-1) \times 7.62$ |

|         |            |
|---------|------------|
| 2p-6p   | $\pm 0.15$ |
| 7p-12p  | $\pm 0.25$ |
| 13p-16p | $\pm 0.35$ |

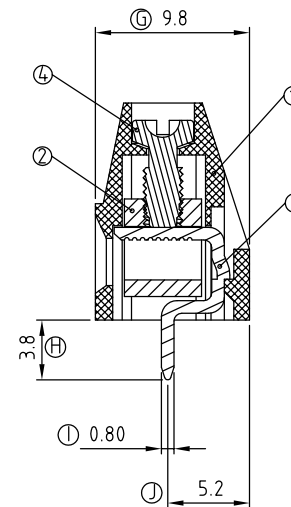

Material:

- Item 1 Terminal housing : Thermoplastic (UL 94V-0)
- Item 2 Clamp : Brass ,Ni plated
- Item 3 Wire guard solder pin : Brass ,Tin plated
- Item 4 Terminal screw: Steel Zinc plating"/+"slot type

Electrical cULus

- Voltage rating: 300VAC
- Current rating: 10A
- Wire range:
- Solid wire(AWG): 12-22
- Stranded wire(AWG): 12-22
- Torque(Lb-In): 3.5
- Screw: M2.5
- Wire strip length: 6-7mm
- Withstanding Voltage: 1.6KV
- Operating temperature: -40°C to +115°C
- Soldering temperature: 250°C $\pm$ 10°C/5 Sec
- Safety Approval:  us

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION 

X.  $\pm$   
.X  $\pm$   
.XX  $\pm$   
.XXX  $\pm$   
ANG  $\pm$

照片框

ORDER INFORMATION

TBH076-D13SX-xx-LF

SERIES

LEADFREE

02~24 WAY  
SCREW"+TYPE

HIGH 13.8mm

DIP 180°

DESCRIPTION: