

DIMENSION		Poles	Tolerance
Dim L	$N \times 7.62$	2p-6p	± 0.15
Dim A	$(N-1) \times 7.62$	7p-12p	± 0.25
		13p-16p	± 0.35




N=Number of contacts

Material:

- Item 1 Terminal housing :Thermoplastic (UL 94V-0)
- Item 2 Clamp : Brass,Ni plated
- Item 3 Wire guard solder pin : Brass,Tin plated
- Item 4 Terminal screw : Steel Zinc plating"/+/-"slot type

Electrical cULus

- Voltage rating: 300VAC
- Current rating: 20A
- Solid wire(AWG): 12-30
- Stranded wire(AWG): 12-30
- Torque(Lb-In): 3.5
- Screw: M3
- Wire strip length: 6-7mm
- Withstanding Voltage: 1.6KV
- Operating temperature: -40°C to $+115^{\circ}\text{C}$
- Soldering temperature: $250^{\circ}\text{C} \pm 10^{\circ}\text{C} / 5 \text{ Sec}$
- Safety Approval:  us

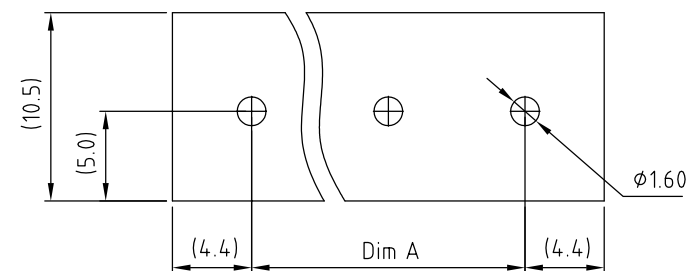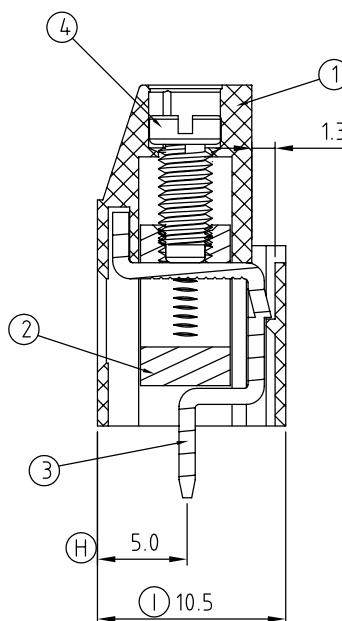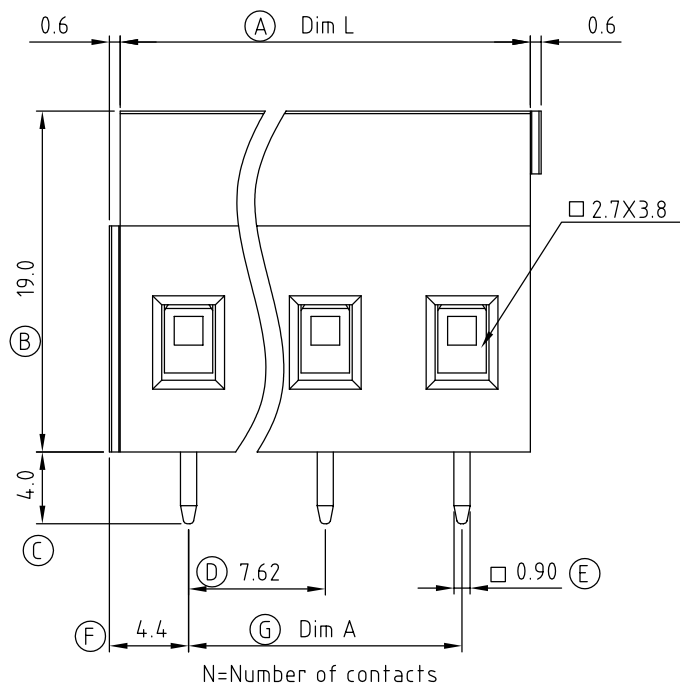

RECOMMENDED PCB LAYOUT

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION 

X, $\pm$
.X $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$

照片框

ORDER INFORMATION

TBH076-D19SX-xx-LF

SERIES

LEADFREE

02~24 WAY

SCREW"+TYPE

HIGH 19.0mm

DIP 180°

DESCRIPTION: